

FRED Modules

V_{RRM} 600V


I_{FAV} 200 A

Applications

Inversion Welder
Uninterruptible Power Supply (UPS)
Plating Power Supply
Ultrasonic Cleaner and Welder
Power Factor Correction (PFC) Circuit
Converter & Chopper

Features

Soft Reverse Recovery Characteristics
Ultrafast Reverse Recovery Time
Low Reverse Recovery Loss
Low Forward Voltage
High Surge Current Capability
Low Inductance Package

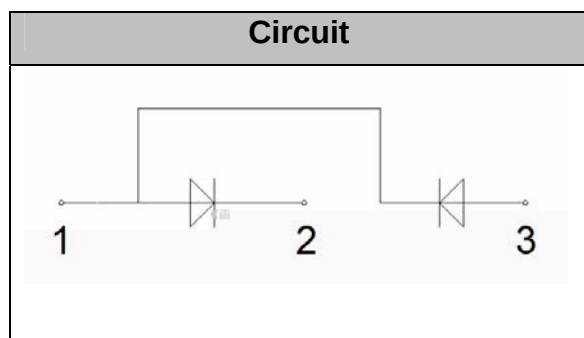

Symbol	Conditions	Values	Units
V_R		600	V
V_{RRM}		600	V
$I_{F(AV)}$	$T_C=110^{\circ}\text{C}$, Per Diode	200	A
	$T_C=120^{\circ}\text{C}$, 20KHz, Per Module	300	A
$I_{F(RMS)}$	$T_C=110^{\circ}\text{C}$, Per Diode	280	A
I_{FSM}	1/2 Cycle , 50Hz, Sine	2000	A
	1/2 Cycle , 60Hz, Sine	2200	A
I^2t	$T_J=45^{\circ}\text{C}$, $t=10\text{ms}$, 50Hz, Sine	20000	A^2s

			N·m
Weight		160	g

Thermal Characteristics

Symbol	Conditions	Values	Units
$R_{th(j-c)}$	Per Module	0.18	/W

Electrical Characteristics

Symbol	Conditions	Values			Units
		Min.	Typ.	Max.	
I_{RM}	$V_R=600V$	--	--	0.5	mA
	$V_R=600V, T_J=125^{\circ}C$	--	--	3	mA
V_F	$I_F=200A$	--	1.15	1.6	V
	$I_F=200A, T_J=125^{\circ}C$	--	0.9	1.25	V
trr	$I_F=1A, V_R=30V, di_F/dt=-200A/\mu s$	--	50	--	ns
trr	$V_R=300V, I_F=200A, di_F/dt=-200A/\mu s, T_J=25^{\circ}C$	--	140	--	ns
I_{RRM}		--	15	--	A
trr	$V_R=300V, I_F=200A, di_F/dt=-200A/\mu s, T_J=125^{\circ}C$	--	230	--	ns
I_{RRM}		--	25	--	A

Performance Curves

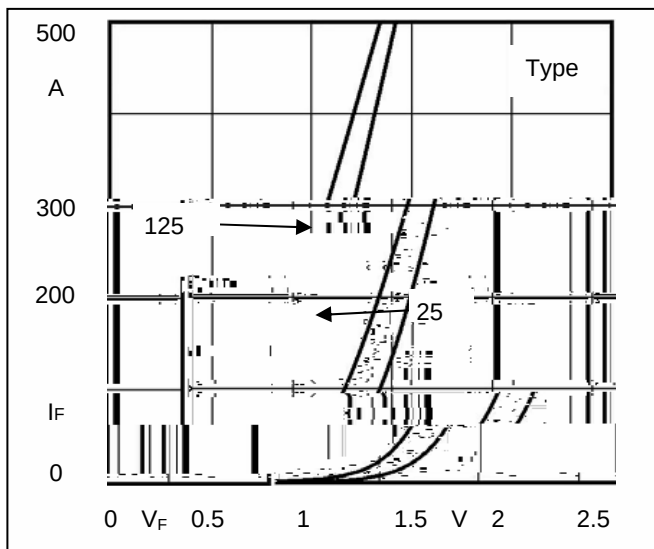


Fig1. Forward Voltage Drop vs Forward Current

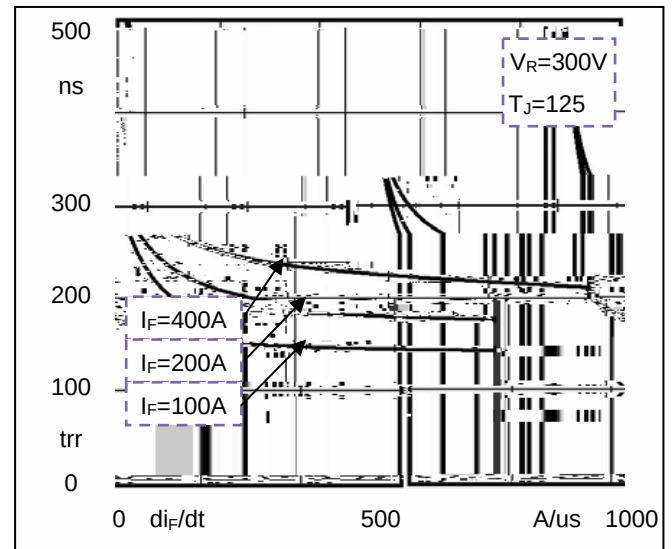


Fig2. Reverse Recovery Time vs di_F/dt

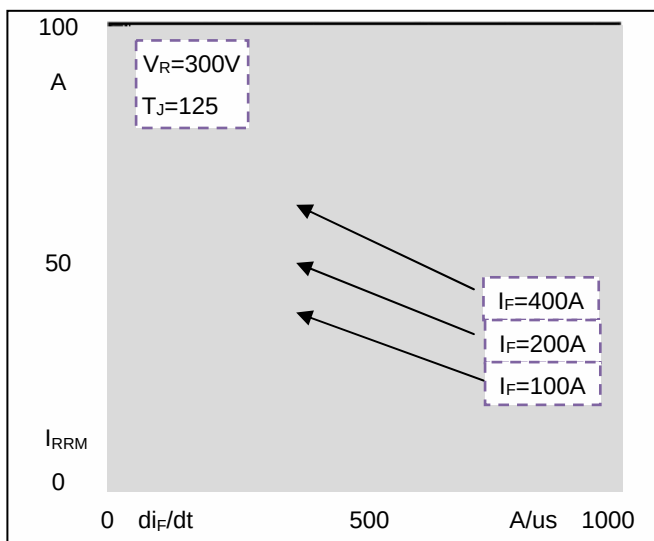


Fig3. Reverse Recovery Current vs di_F/dt

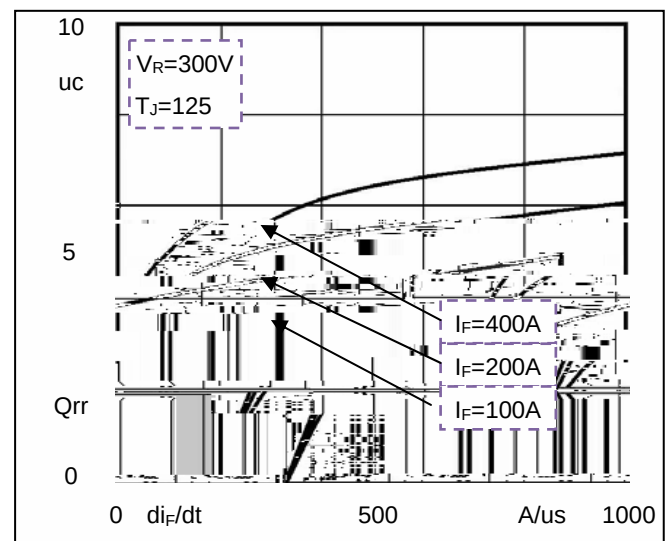


Fig4. Reverse Recovery Charge vs di_F/dt



Package Outline Information

