



- For sensitive ESD protection
 - Low leakage
 - Uni-directional ESD protection of one line
 - Epoxy meets UL 94 V-0 flammability rating
 - Moisture Sensitivity Level 1
-
- : SOD523
 - : Tin plated leads, solderable per J-STD-002 and JESD22-B102
 - Cathode line denotes the cathode end
 - ZE



	1	16	A


(1).Non-repetitive current pulse 8/20I



Reverse Standoff Voltage	V_{RWM}^1	V				3.3
Reverse Leakage Current	I_R	uA	$V_{RWM}=3.3V$			0.08
Breakdown Voltage	$V_{(BR)}$	V	$I_T=1mA$	5		
Clamping Voltage	V_C^2					

ESD3V3D5

vOutline Dimensions

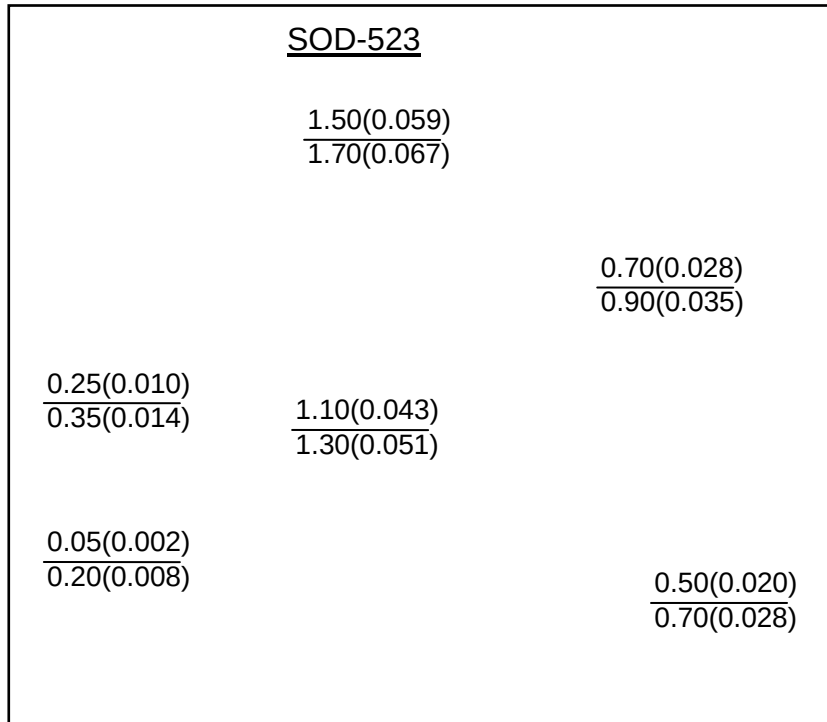

vSoldering Footprint





The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be r h u s