

ABS22A THRU ABS210A

Bridge Rectifiers

Features

UL recognition, file #E313149
 Ideal for automated placement
 Glass passivated chip junction
 High surge current capability
 Meets MSL level 1, per J-STD-020, LF maximum peak of 260 °C

Typical Applications

General purpose use in AC/DC bridge full wave rectification for SMPS, lighting ballast, adapter, battery charger, home appliances, office equipment, and telecommunication applications.

Mechanical Data

Package: ABS
 Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant, Halogen free
Terminals: Tin plated leads, solderable per J-STD-002 and JESD22-B102
Polarity: As marked on body

5 Unless otherwise specified

	SYMBOL	UNIT	ABS22A	ABS24A	ABS26A	ABS28A	ABS210A
			ABS22A	ABS24A	ABS26A	ABS28A	ABS210A
oltage	VRRM	V	200	400	600	800	1000
	VRMS	V	140	280	420	560	700
	VDC	V	200	400	600	800	1000
	IO	A	2.0				
	IFSM	A	60				
			120				
diode	I ² t	A ² s	14.9				
	T _{stg}		-55 ~ +150				
	T _j		-55 ~ +150				

6 T_a=25 Unless otherwise specified

Q



ABS22A THRU ABS210A

Thermal Characteristics $T_a=25$ Unless otherwise specified


PARAMETER		SYMBOL	UNIT	ABS22A	ABS24A	ABS26A	ABS28A	ABS210A
Thermal Resistance	Between junction and ambient, On alumina substrate	R J-A	/W	62.5				
	Between junction and lead	R J-L		25.0				
	Between junction and case	R J-C		8.0				

Note: Device mounted on P.C.B with 35mm*25mm*1.7mm

Ordering Information (Example)

PREFERED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
ABS22A - ABS210A	F1	Approximate 0.095	4000	/	64000	13" reel
ABS22A - ABS210A	F5	Approximate 0.095	5000	/	80000	13" reel

Characteristics (Typical)

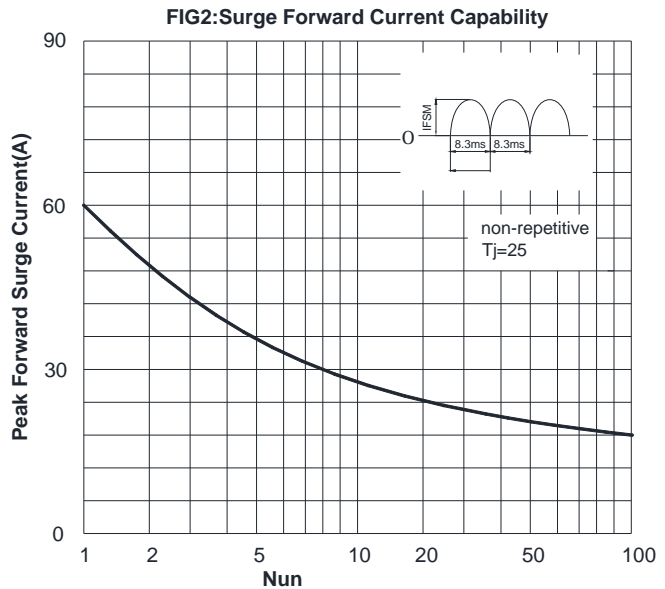



ABS22A THRU ABS210A

Outline Dimensions

ABS

ABS		
Dim	Min	Max
A	4.30	4.50
B	6.00	6.40
C	3.90	4.10
D	4.90	5.10
E	1.25	1.45
F	1.60 Max	
G	0.60	0.70
H	0.15	0.25
I	0.30	0.80
J	0.02	0.15

Suggested pad layout

Dim	Min
P1	5.72
P2	4.00
Q1	1.00
Q2	0.90



ABS22A THRU ABS210A

Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.