

Battery Contacts
Power management
Power supply protection


Mechanical Characteristics

Package: DFN1610-2L
Case Material: "Green" Molding Compound.
Moisture Sensitivity: Level 3 per J-STD-020
Marking Information: See Below



Device	Device code
ESD7V0P6A	7DA
ESD10VP6A	aDA
ESD12VP6A	cDA
ESD15VP6A	fDA

Definitions of electrical characteristics

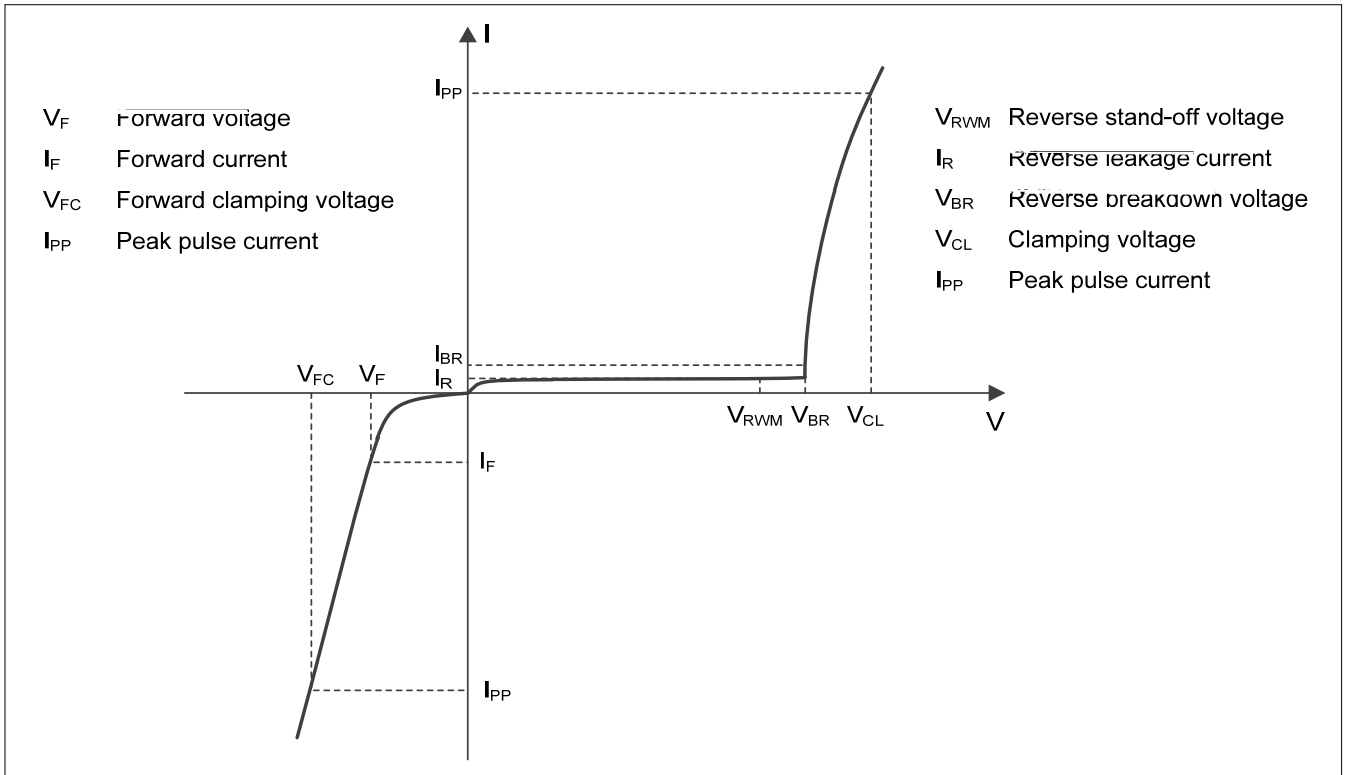



ESD7V0P6A THRU ESD15VP6A

Absolute Maximum Ratings ($T_a=25^\circ\text{C}$ unless otherwise specified)


[Redacted content]

ESD7V0P6A THRU ESD15VP6A




ESD7V0P6A THRU ESD15VP6A

Outline Dimensions

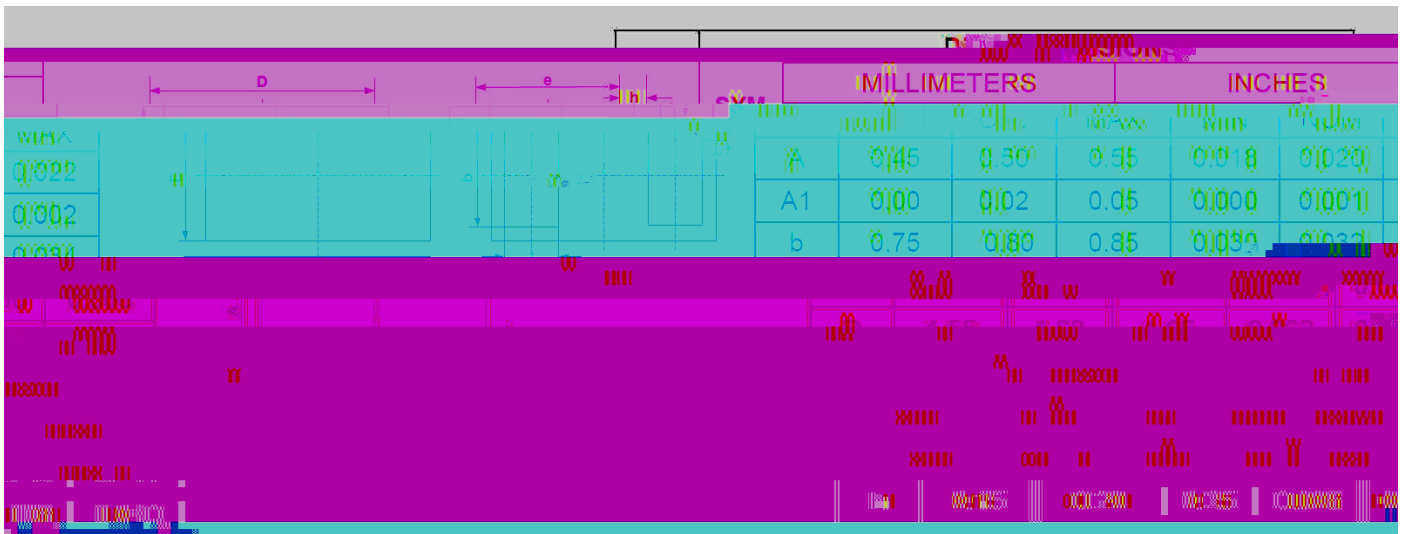

Recommend land pattern (Unit:mm)

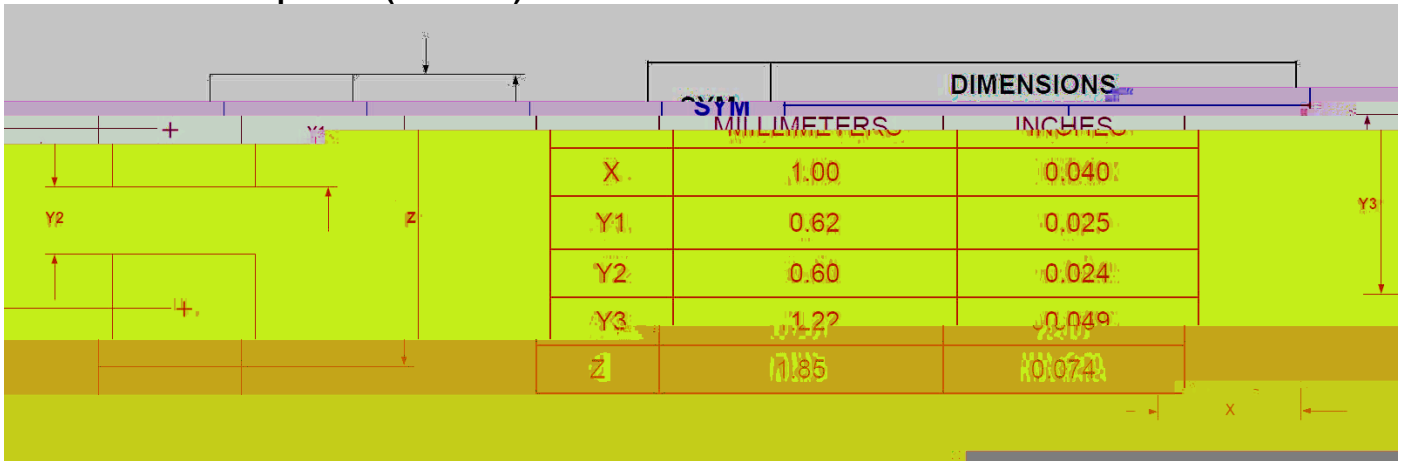

Notes:

This recommended land pattern is for reference purposes only. Please consult your manufacturing group to ensure your PCB design guidelines are met.



ESD7V0P6A THRU ESD15VP6A

Disclaimer

The information presented in this document is for reference onl