




Fast Recovery Bridge Rectifiers



Features

- UL recognition, file #E313149
- Ideal for automated placement
- Glass passivated chip junction
- High surge current capability
- Meets MSL level 1, per J-STD-020, LF maximum peak of 260 °C

Typical Applications

General purpose use in high frequency AC/DC bridge full wave rectification for SMPS, lighting ballast, adapter, battery charger, home appliances, office equipment, and telecommunication applications.

Mechanical Data

- **Package:** ABS
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant, Halogen free
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** As marked on body

■Maximum Ratings (T_a=25 °C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	RABS10
Device marking code			RABS10
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	V	1000
Maximum RMS Voltage	V _{RMS}	V	700
Maximum DC blocking Voltage	V _{DC}	V	1000
Average rectified output current @60Hz sine wave, R-load, T _c =130 °C	I _O	A	1.0
Forward Surge Current "	I _F	Ń	

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	RABS10
Maximum reverse recovery time	t _{rr}	ns	I _F =0.5A, I _R =1.0A, I _{rr} =0.25A	500
Maximum instantaneous forward voltage drop per diode	V _F	V	I _{FM} =0.5A	1.3
Maximum DC reverse current at rated DC blocking voltage per diode	I _R	μA	T _j =25 °C	5
			T _j	
Typical junction capacitance	C _j	pF	Measured at 1MHz and Applied Reverse Voltage of 4.0 V.D.C	




■Thermal Characteristics $T_a=25$ Unless otherwise specified

PARAMETER	
-----------	--



RABS10

FIG.5: Diagram of circuit and Testing wave form of reverse recovery time

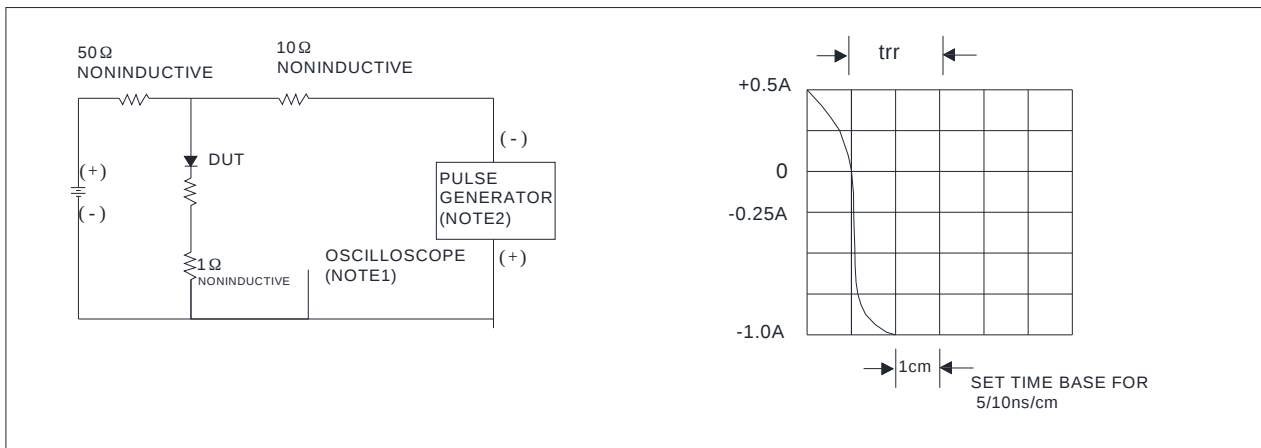

■ Outline Dimensions

ABS		
Dim	Min	Max
A	4.30	4.50
B	6.00	6.40
C	3.90	4.10
D	4.90	5.10
E	1.25	1.45
F	1.60 Max	
G	0.60	0.70
H	0.15	0.25
I	0.30	0.80
J	0.02	0.15

■ Suggested pad layout

Dim	Min
P1	5.72
P2	4.00
Q1	1.00
Q2	0.90



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.