

DFN0603-2L

- Stand-off voltage: 24V Max
- Transient protection for each line according to
IEC61000-4-2(ESD): $\pm 30\text{kV}$ (contact)
IEC61000-4-5(surge): 5A (8/20 μs)
- Low leakage current
- Low clamping voltage
- Low clamping voltage:
 $V_{CL} = 30\text{V typ. @ IPP} = 16\text{A (TLP)}$
- RoHS Compliant


- Cellular Handsets and Accessories
- Personal Digital Assistants
- Notebooks and Handhelds
- Portable Instrumentation
- Digital Cameras
- Peripherals
- Audio Players


- Package: DFN0603-2L
- Case Material: "Green" Molding Compound
- Moisture Sensitivity: Level 3 per J-STD-020

P æ M

CL

CL = Device Marking Code

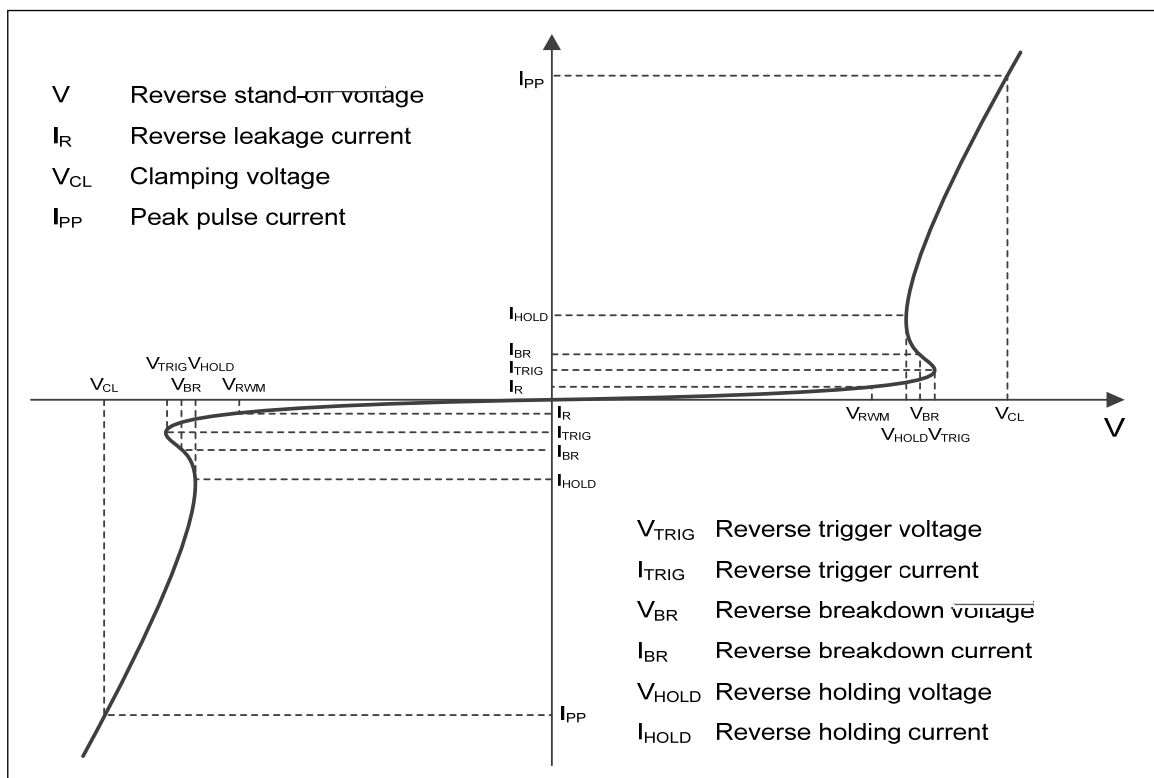

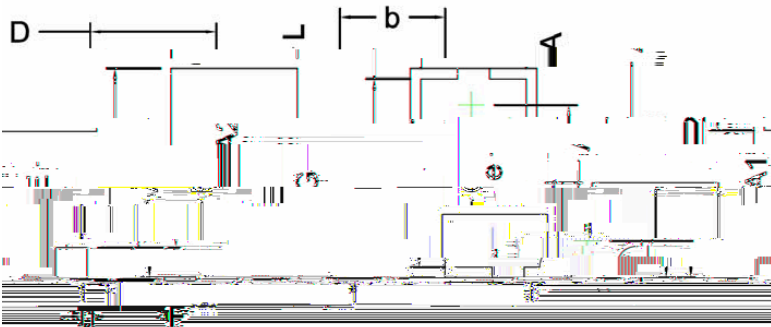

	0.25	0.30	0.35
	0.55	0.60	0.67
	0.28	0.30	0.32
	0.102 BSC		
			0.05
	0.005		

Unit:mm

