


Glass Passivated Three Phase Rectifier Bridge

V_{RRM}
I

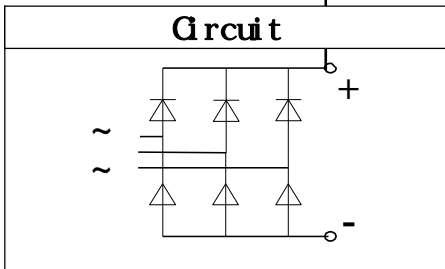

TYPE	V_{RRM}	V_{RSM}

Maximum Ratings

Symbol	Conditions	Values	Units

Thermal Characteristics

Symbol	Conditions	Values	Units
	Module fl Approximately L	\$. \$ +	

Electrical Characteristics

Symbol	Conditions	Values			Units
		Min.	Typ.	Max.	

Performance Curves

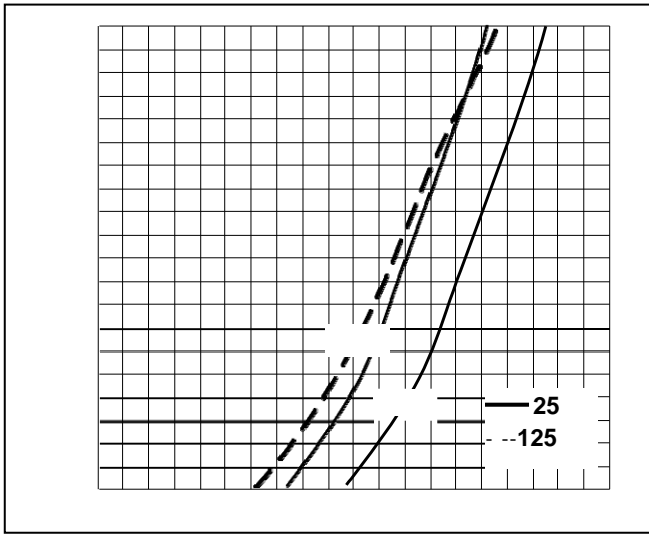


Fig1. Forward Characteristics

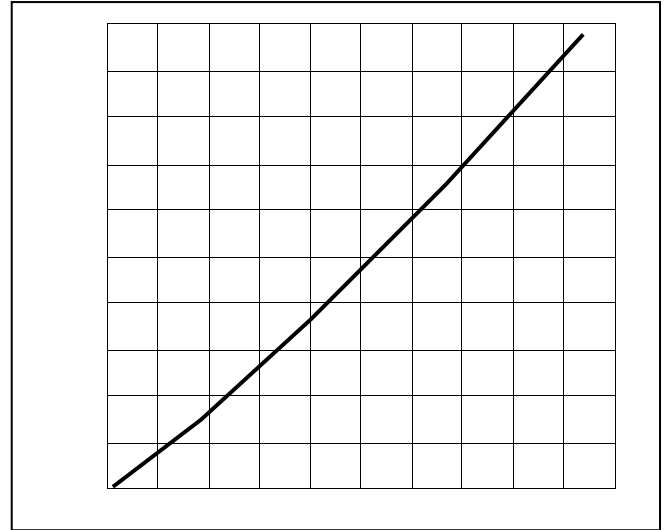


Fig2. Power dissipation

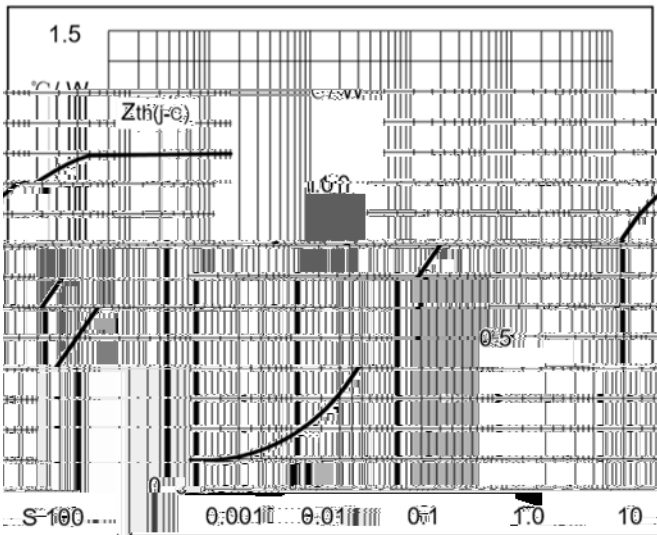


Fig3. Transient thermal impedance

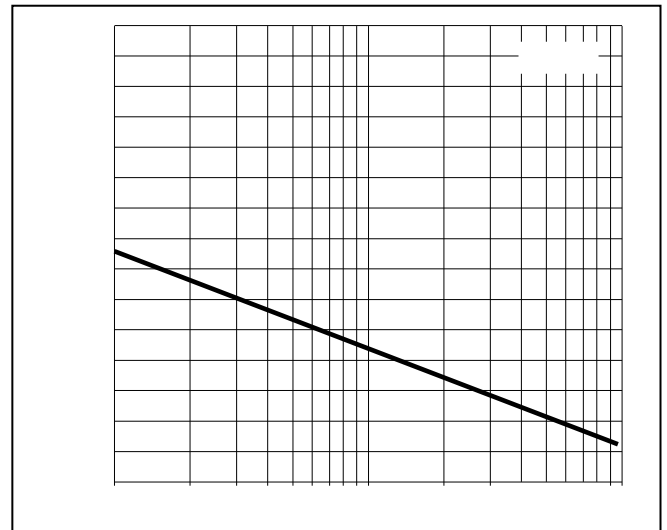


Fig4. Max Non-Repetitive Forward Surge Current


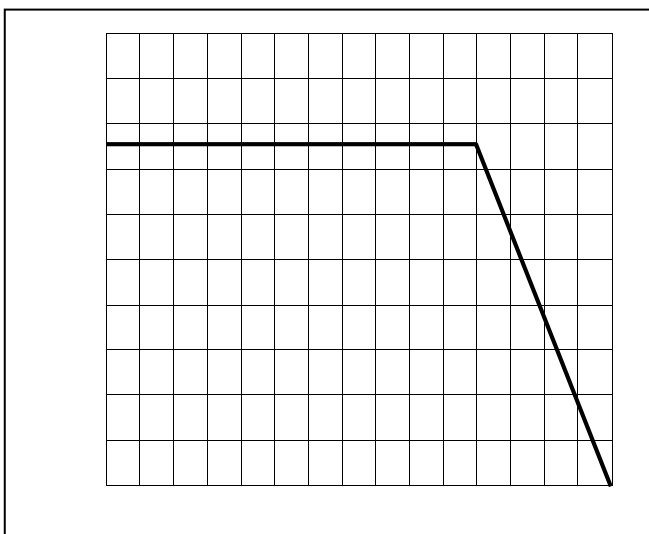


Fig5. Forward Current Derating Curve

Package Outline Information

CASE M8

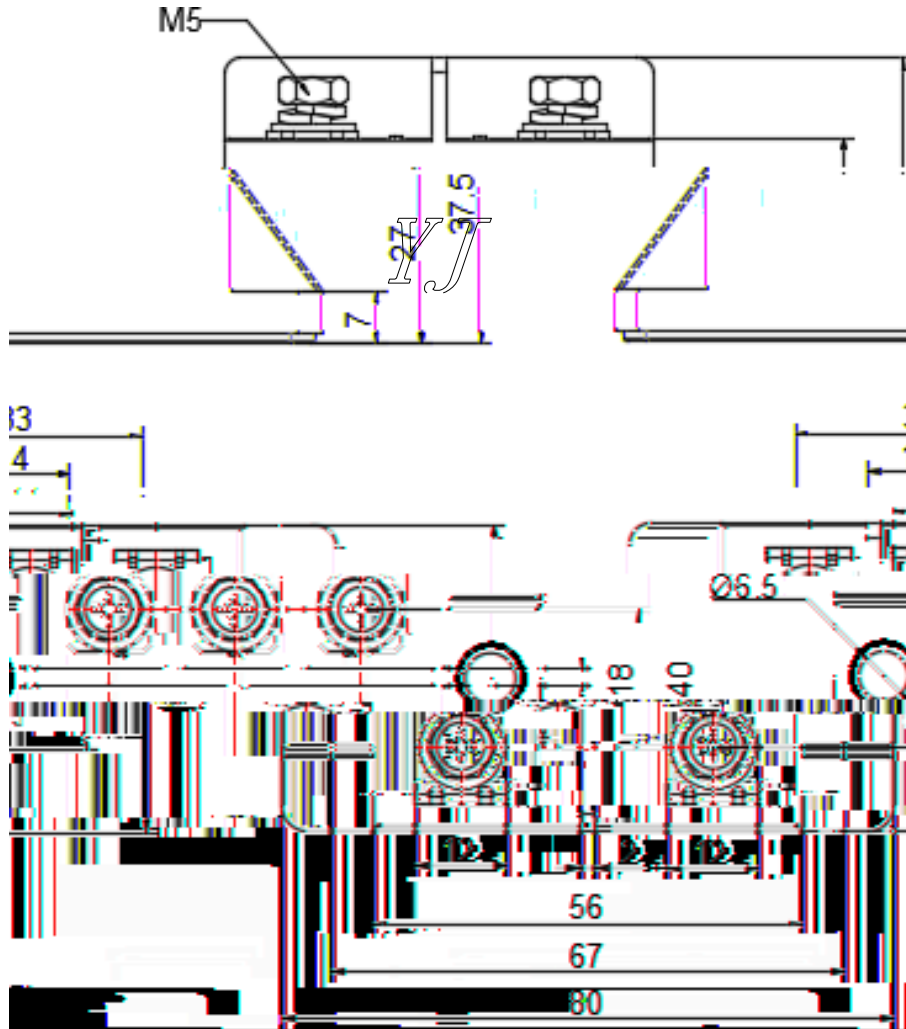

Dimensions in mm