



Maximum Ratings

Symbol	Conditions	Values	Units
V_R		1200	V
V_{RRM}		1200	V
$I_{F(AV)}$	$T_C=110^{\circ}\text{C}$, Per Diode	200	A

			A
I^2t	$T_J=45^{\circ}\text{C}$, $t=10\text{ms}$, 50Hz, Sine	16200	A^2s
	$T_J=45^{\circ}\text{C}$, $t=8.3\text{ms}$, 60Hz, Sine	19000	A^2s
P_D		568	W
Visol	AC, $T_{on}=1\text{min}$	3000	V
T_J		-40 to +150	$^{\circ}\text{C}$
T_{STG}		-40 to +125	$^{\circ}\text{C}$
Torque	RecommendedHM6H	4.5	N·m
Torque	RecommendedHM6H	4.5	N·m

			Units
$R_{th(j-c)}$	Junction-to-Case	0.22	/W

FRED

Module13936



T262

re38

Electrical Characteristics

Symbol	Conditions	Values			Units
		Min.	Typ.	Max.	
I_{RM}	$V_R=1200V$	--	--	1	mA
	$V_R=1200V, T_J=125^{\circ}C$	--	--	5	mA
V_F	$I_F=200A$	--	2.3	--	V
	$I_F=200A, T_J=125^{\circ}C$	--	1.9	--	V
trr	$I_F=1A, V_R=30V, di_F/dt=-200A/s$	--	57	--	ns
trr	$V_R=600V, I_F=200A, di_F/dt=-200A/s, T_J=25^{\circ}C$	--	110	--	ns
I_{RRM}		--	9	--	A
trr	$V_R=600V, I_F=200A, di_F/dt=-200A/s, T_J=125^{\circ}C$	--	500	--	ns
I_{RRM}		--	21	--	A

Performance Curves

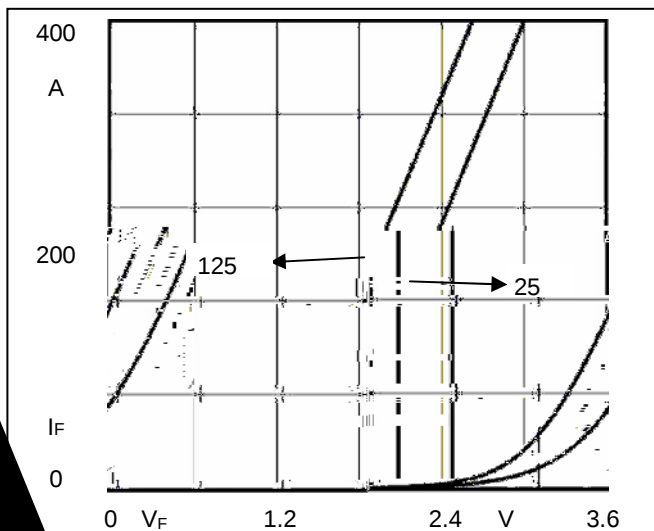


Fig1. Forward Voltage Drop vs Forward Current

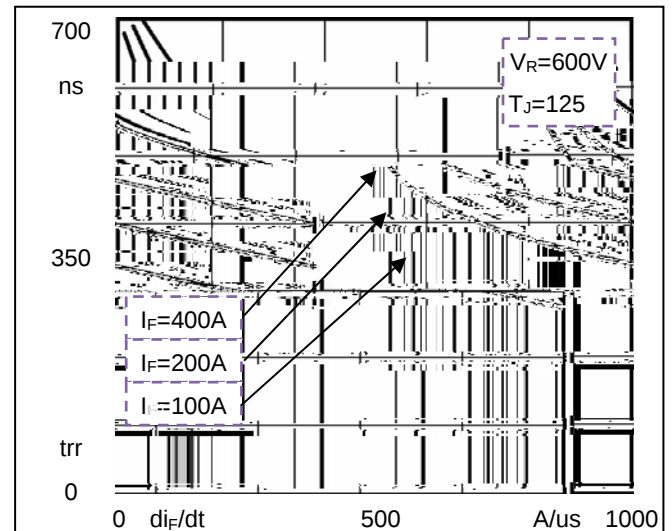


Fig2. Reverse Recovery Time vs di_F/dt

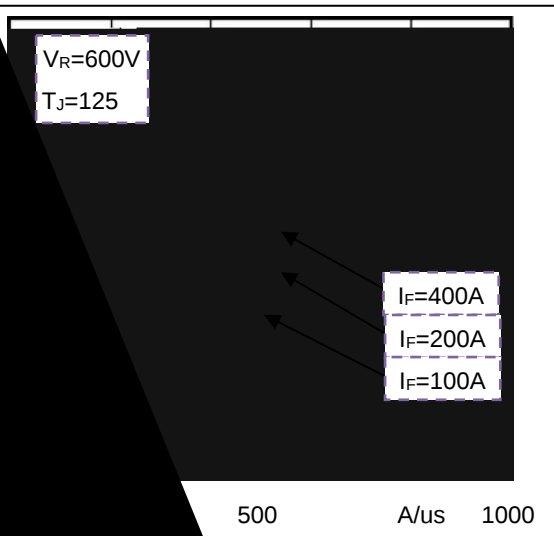


Fig3. Reverse Recovery Current vs di_F/dt


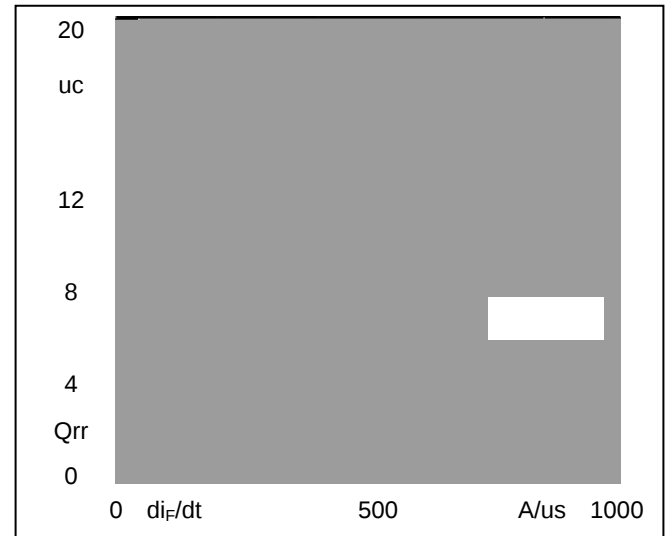


Fig4. Reverse Recovery Charge vs di_F/dt

Package Outline Information

CASE: F2N

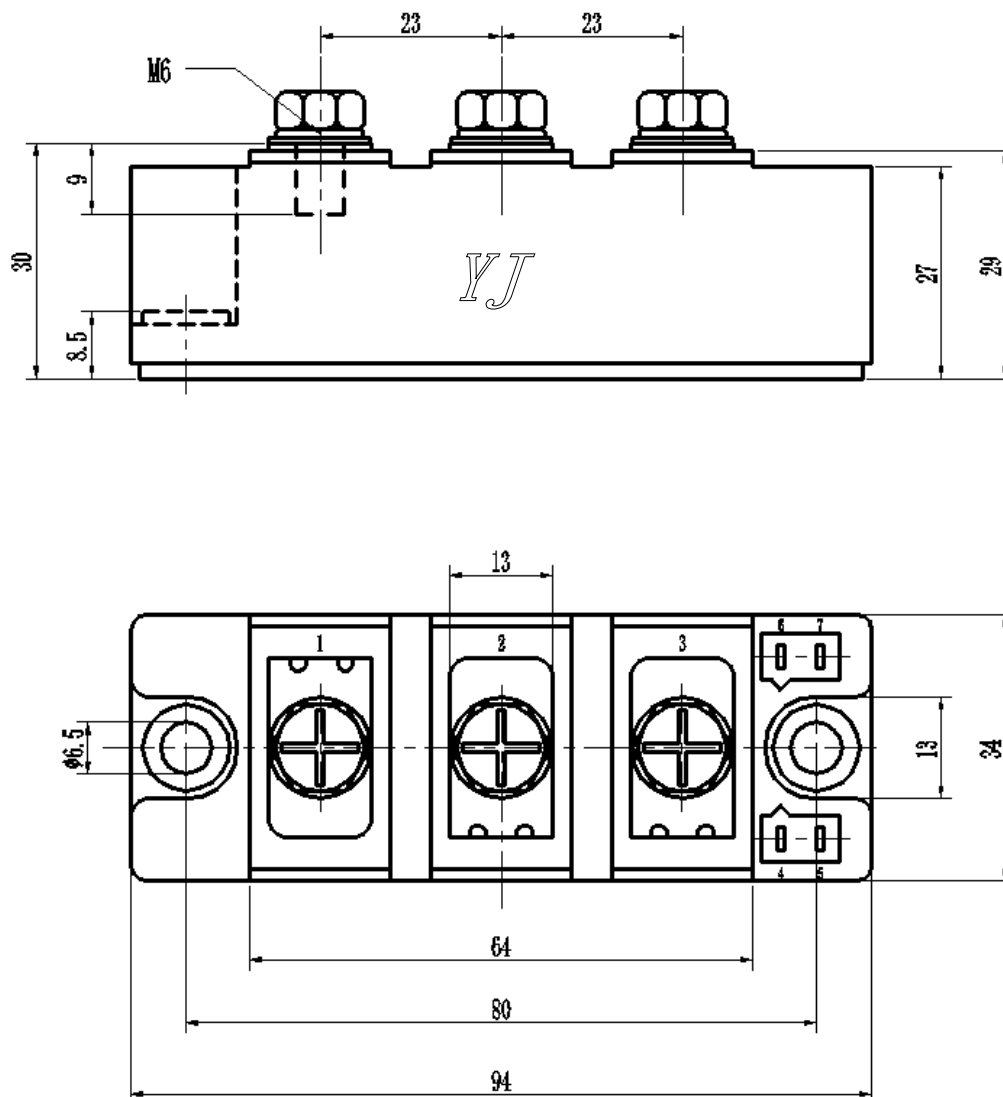

Dimensions in mm