





2N7002KDHQ

■ Electrical Characteristics ($T_J=25$ unless otherwise noted)

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Static Parameter						
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{GS}=0V, I_D=250\mu A$	60			V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=60V, V_{GS}=0V$			1	μA
Gate-Body Leakage Current	I_{GSS}	$V_{GS}= \pm 20V, V_{DS}=0V$			± 10	μA
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}= V_{GS}, I_D=250\mu A$	1.1	1.5	2.4	V
Static Drain-Source On-Resistance	$R_{DS(on)}$	$V_{GS}= 10V, I_D=300mA$		1.1	2.0	Ω
		$V_{GS}= 4.5V, I_D=200mA$		1.3	2.5	
Diode Forward Voltage	V_{SD}	$I_S=115mA, V_{GS}$				



■ Typical Performance Characteristics

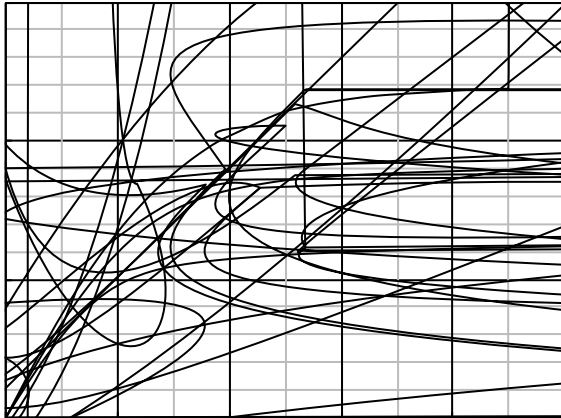


Figure1. Output Characteristics




Figure2. Transfer Characteristics

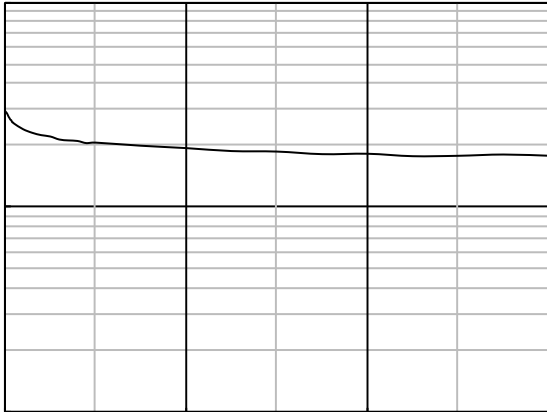


Figure3. Capacitance Characteristics

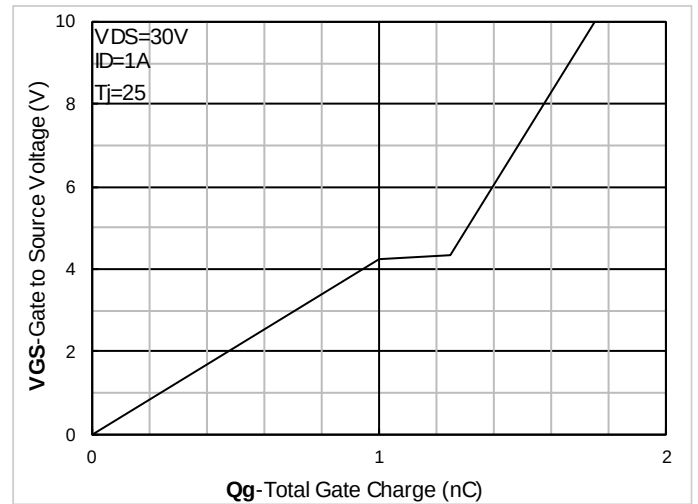


Figure4. Gate Charge

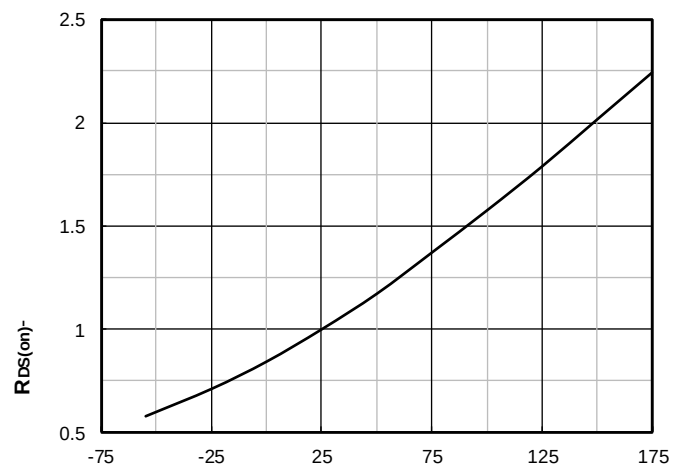


Figure5. On-Resistance vs Gate to Source Voltage

Figure6. Normalized On-Resistance








■ SOT-23 Package Outline Dimensions

UNIT mm

■ Marking Information

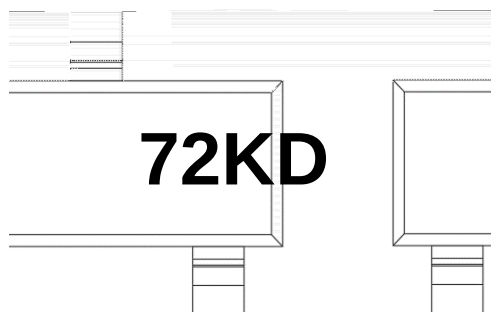

Note:

1. All marking is at middle of the product body
2. All marking is in laser marking
3. 72KD is Marking Code
4. Body color: Black

