



2- Line, Bi-directional, ESD protection diode

Features

- " 7UDQVLHQW SURWHFWLRQ IRU HDFK OL
- ,(& (6'Fiiis }vš šU Fiiis]OE
- ,(& ò ~š%Aôlii... ••
- " /RZ OHDNDJH FXUUHQW
- " 8OWUD ORZ FODPSLQJ YROWDJH
- " 5R+6 &RPSOLDQW
- " 3DUW QR ZLWRKHVQIWL\$(3& 4 TXDOLILH


Applications

- "s Z] o }u]v }všOE}oo OE Us h o š
- %o OE}š š}}v
- " o šOE}•š š] %o OE}š š}}v (}OE μš}u}
- o šOE}v] uμoš]u]]vš OE(
- " E μ• %o OE}š š}}v
- " μš}u}š]Å %o%o o] š}}v•

Mechanical Data


- " 3DFNDJH 627
- " /HDG)LQLVK 0DWWH 7LQ
- " &DVH0DWHULDO 3*UHHQ' 0ROGLQJ &R
- " 0RLVWXUH 6HQVLWLYLW\ /HYHO SHU

Definitions of electrical characteristics

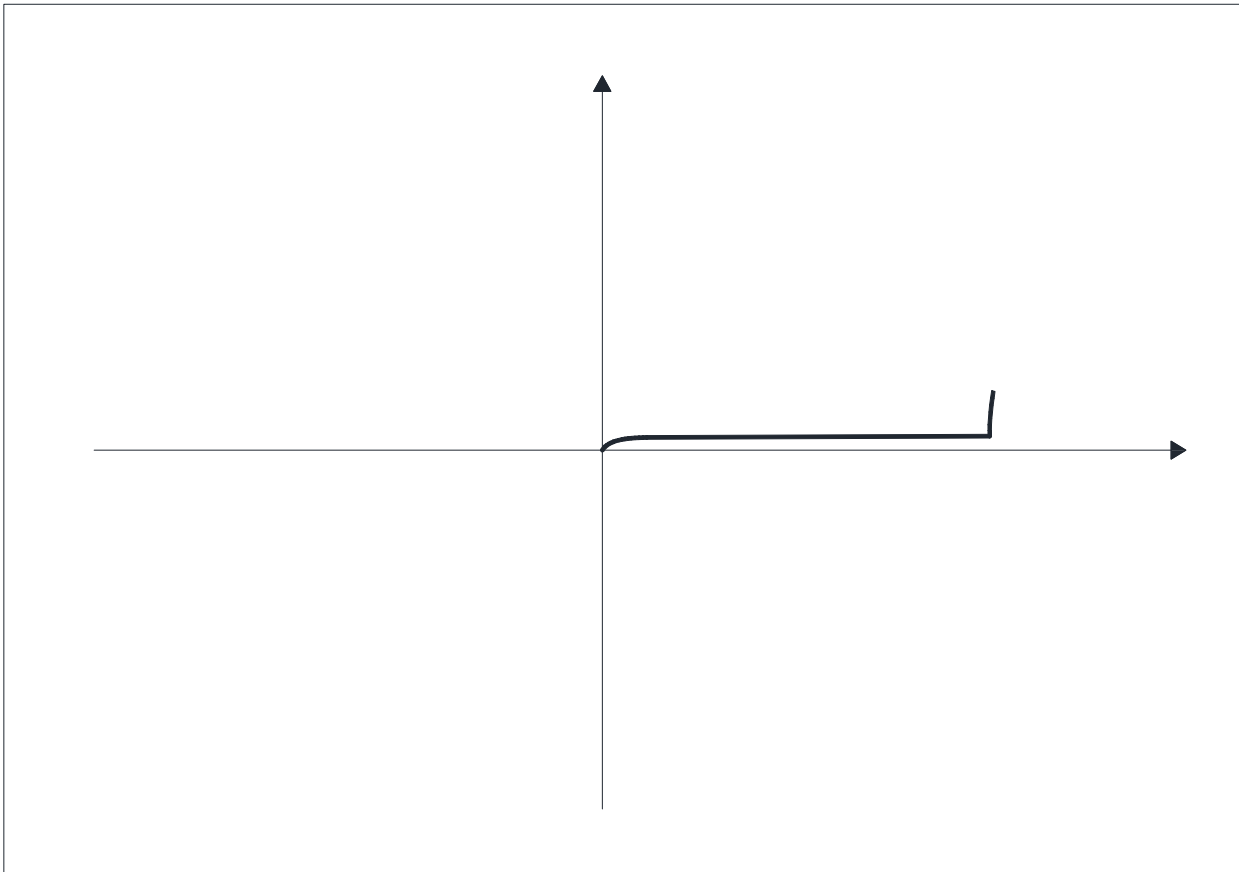



Maximum Ratings





vOutline Dimensions

vMarking Information

í î ^ X

1RWH \$OO PDUNLQJ LV DW PLGGOH RI WKH SURGXFW ERG\ \$OO PDUNLQJ LV LQ ODVHU PDUNLQJ %RG\ FRORU %ODFN



ESD1202EBSQ

Disclaimer

7KH LQIRUPDWLRQ SGRFWRUHQW LQ IRU KLW DQJXHQH BQQMLH (OHFWURQLF 7HFKQRO
ULJKW WR PDNH FKDLFH VRZLWKR XWSKRLS IURDQXIRVQ/ RGLWSOD\HG KHUHLQ WURGLPVLWRY
RU RWKHUZLVH

7KH SURGXFWWRUHQW IURDQJHQ WR EH MHHGHZVNDK DQRPB WLYJQHG IRU XVH LQ PHG
VDYLQJ OLIHVXVWRDQJHQ IURDQJHQ BQVXPHHQK UHVSREQLELORW\ BQWGPDUH
P VXFK LPSURSHU XVH RI VDOH

7KLV SXEOLFDWLRQ SVXSHUW DQJXHQV LQURPDVLSRQLSHYRURXVGLWLRQDO LQWRUPDWLR
KWW [VZ](#) [\DQJMLHR](#) FRPRQVXOW \RXU QHDUHVW <DQJMLVHM\QVFB\OHV RILFH IRU IXUW