



## Silicon Carbide Schottky Diode

### Features

- Positive temperature coefficient
- Temperature-independent switching
- Maximum working temperature at 175 °C
- Unipolar devices and zero reverse recovery current
- Zero forward recovery current
- Essentially no switching losses
- Reduction of heat sink requirements
- High-frequency operation
- Reduction of EMI

### Typical Applications

Typical applications are in power factor correction(PFC), solar inverter, uninterruptible power supply, motor drives, photovoltaic inverter, electric car and charger.

### Mechanical Data

**Package:** TO-220AC

Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant, halogen-free

**Terminals:** Tin plated leads

**Polarity:** As marked

### Maximum Ratings ( $T_C=25$ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	VAL <i>f</i>
-----------	--------	------	--------------

## Electrical Characteristics

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	Typ.	Max.
Forward voltage drop	$V_F$	V	$I_F=20A, T_j=25^\circ C$	1.45	1.55
			$I_F=20A, T_j=175^\circ C$	2.1	-
Reverse leakage current	$I_R$	$\mu A$	$V_R=1200V, T_j=25^\circ C$	3	20
			$V_R=1200V, T_j=175^\circ C$	19	-
Total capacitive charge	$Q_C$	nC	$V_R=800V, T_j=25^\circ C$ , $Q_C = \int_0^{V_R} C(V)dV$	91	-
Total capacitance	C	$\mu F$	$V_R=0V, f=1MHz$	1280	-
			$V_R=400V, f=1MHz$	87	-
			$V_R=800V, f=1MHz$	64	-
Capacitance Stored Energy	$E_C$	$\mu J$	$V_R=800V$	23	-

## Thermal Characteristics $T_a=25$ Unless otherwise specified

PARAMETER	SYMBOL	UNIT	VALUE
Thermal resistance	$R_{J-C}$	$^\circ C/W$	0.88

## Typical Characteristics

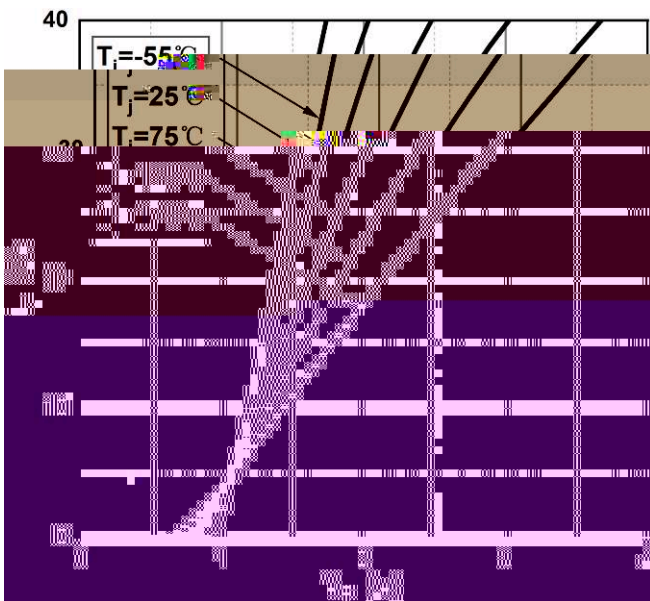


Figure 1. Forward Characteristics

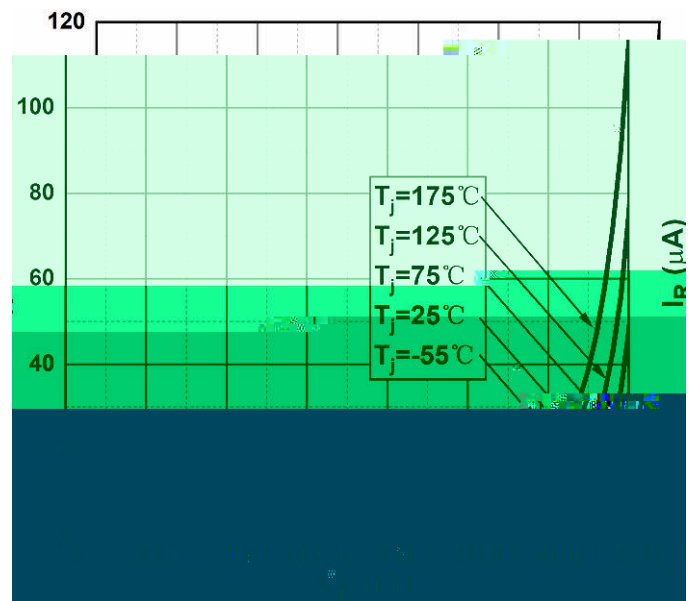


Figure 2. Reverse Characteristics



Figure 3. Capacitance vs. Reverse Voltage

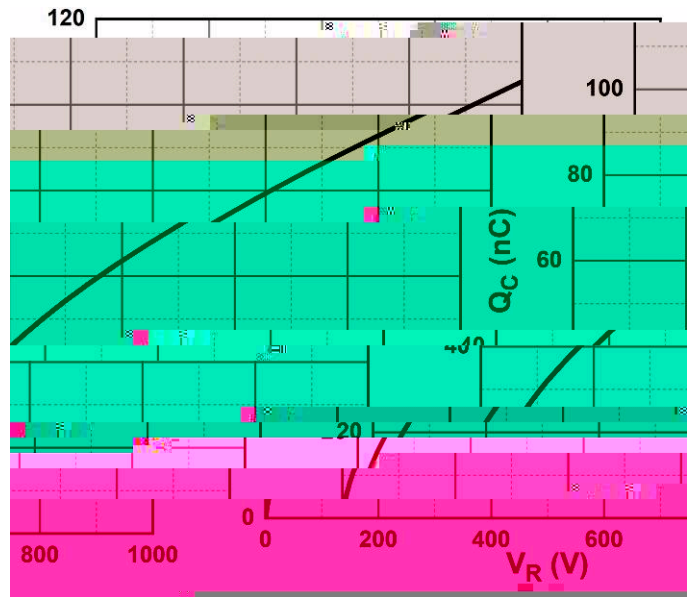


Figure 4. Total Capacitance Charge vs. Reverse Voltage

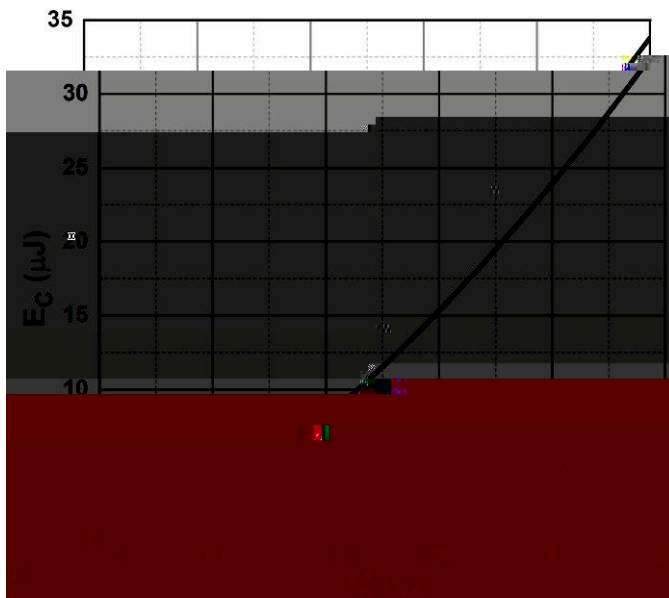


Figure 5. Capacitance Stored Energy

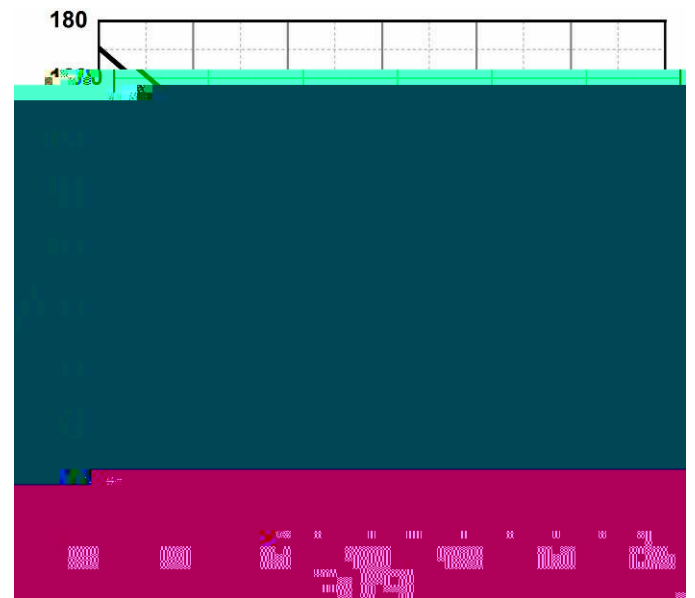


Figure 6. Power Derating

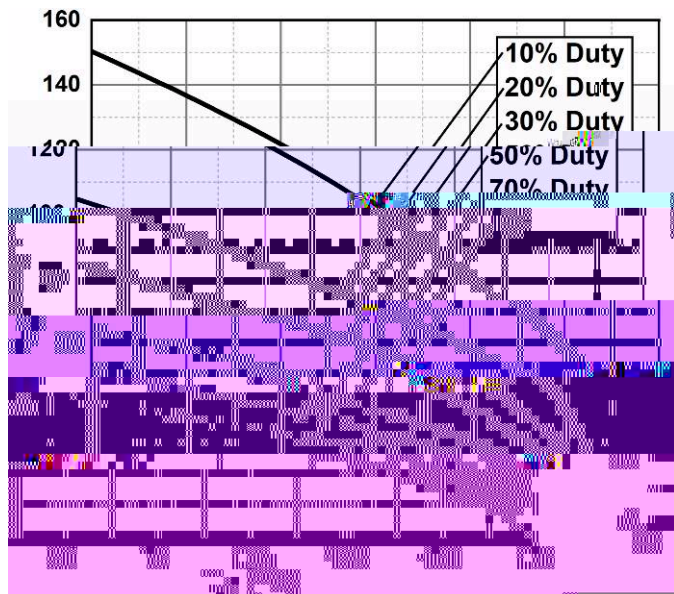


Figure 7. Current Derating

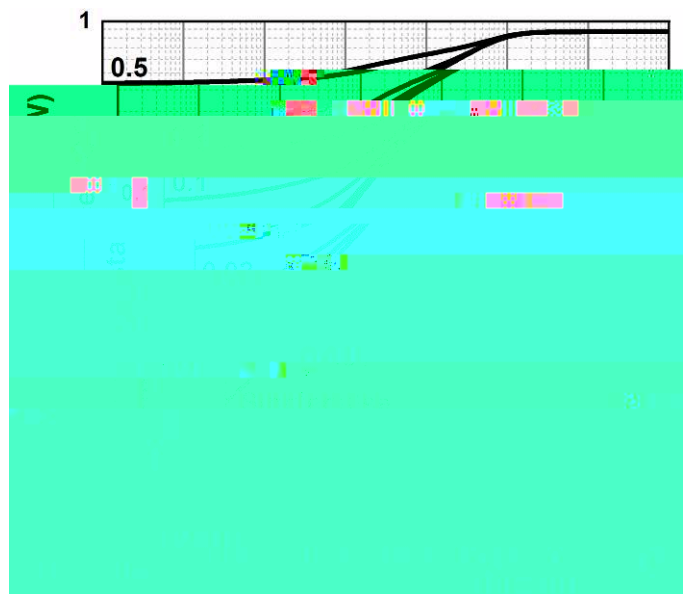


Figure 8. Transient Thermal Impedance

## Outline Dimensions

