



BAS521

Small-Signal Switching Diodes

Features

VR 250V
I_{FAV} 200mA

Typical Applications

Extreme fast switches

Mechanical Data

Package: SOD523
Terminals: Tin plated leads, solderable per J-STD-002 and JESD22-B102
Polarity: Cathode line denotes the cathode end
Marking: JS

Maximum Ratings (Ta=25 Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	Conditions	VALUE
Repetitive peak reverse voltage	V _{RRM}	V		250
Reverse Voltage	V _R	V		250
Non-Repetitive Peak Forward Surge Current	I _{FSM}	A	t=8.3ms, Half sine-wave	2
Average forward current	I _{FAV}	mA		200
Power dissipation	P _D	mW		150
Junction temperature	T _j			150
Storage temperature range	T _{stg}			-55 to +150

Electrical Characteristics Ta=25 Unless otherwise specified

PARAMETER	SYMBOL	UNIT	Conditions	Min	Max
Maximum Forward voltage	V _F	V	I _F =100mA		1.1
Maximum Reverse current	I _R	nA	V _R =250V		150
Minimum Breakdown voltage	V _R	V	I _R =100uA	250	
Maximum Diode capacitance	C _D				




BAS521

Ordering Information (Example)

PREFERRED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
BAS521	F2	Approximate 0.002	8000	80000	320000	7" reel


Characteristics(Typical)

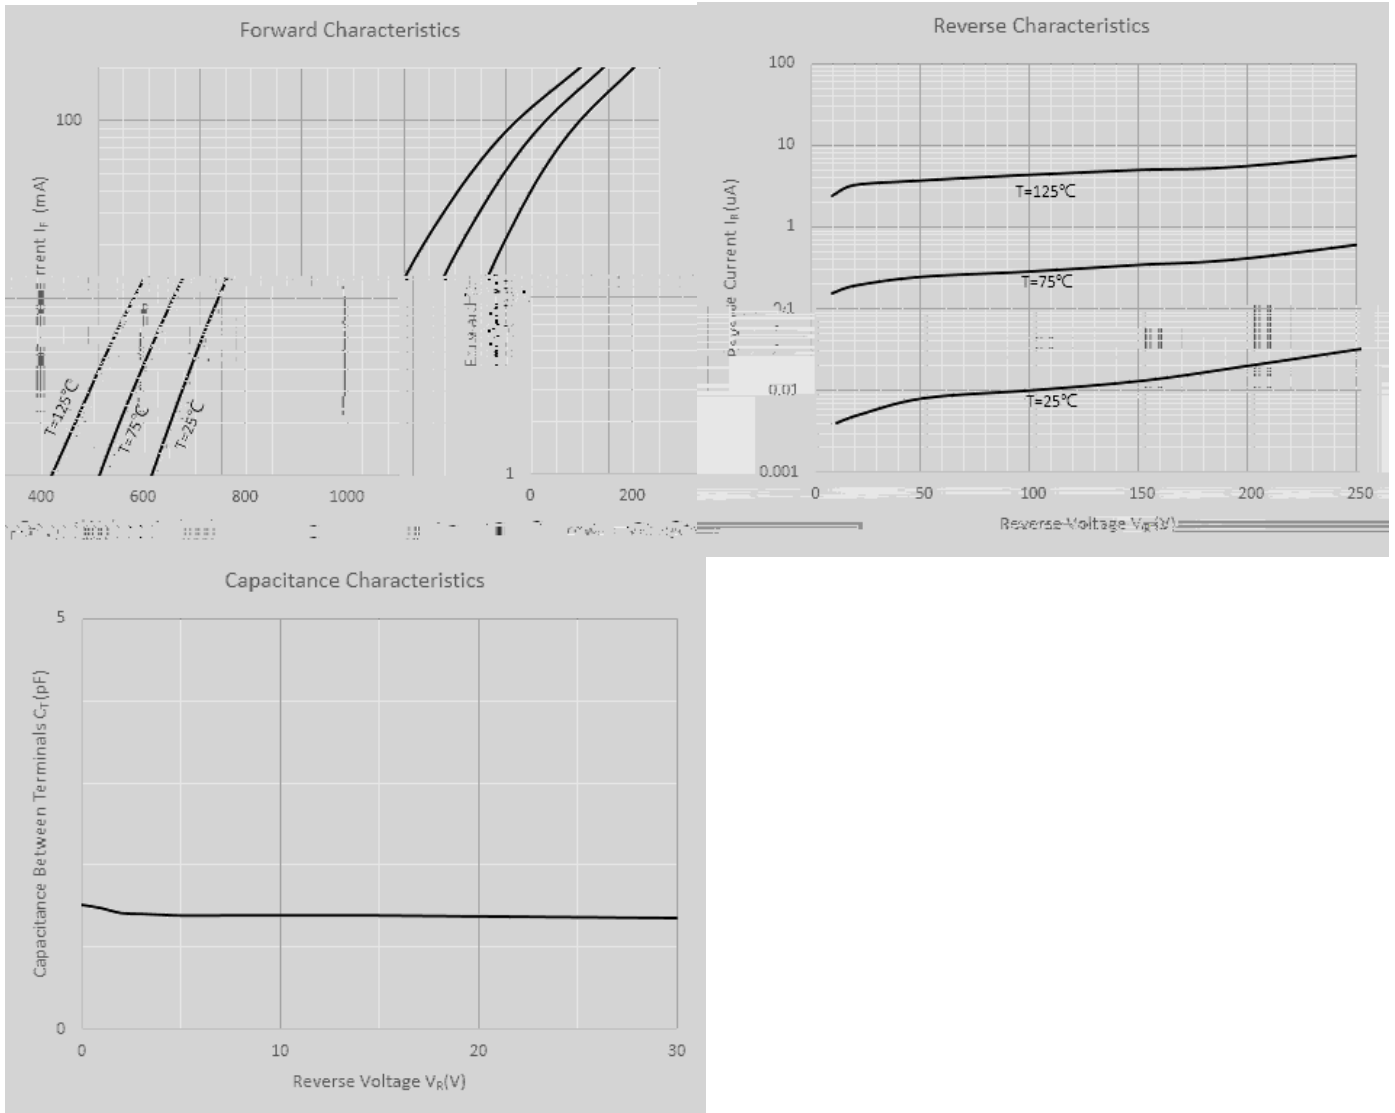



BAS521

Outline Dimensions

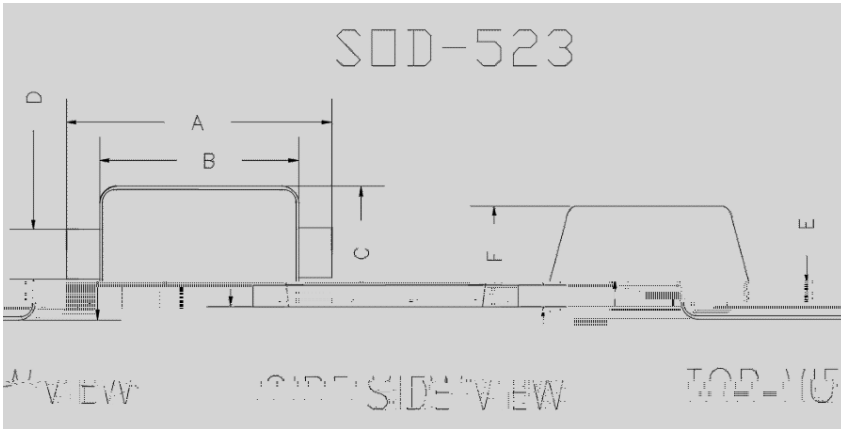

DIMENSIONS				
DIM	INCHES		MM	
	MIN	MAX	MIN	MAX
A	0.059	0.067	1.500	1.700
B	0.043	0.051	1.100	1.300
C	0.0075	0.0090	0.190	0.230
D	0.250	0.350	6.35	8.89
E	0.050	0.200	1.27	5.08
F	0.000	0.000	0.000	0.000

Soldering Footprint

