




BAW56

RoHS
COMPLIANT

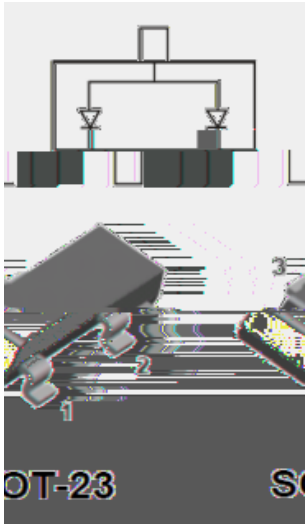

Moisture sensitivity level 1
Reverse voltage 100V

Signal switching
High frequency rectifier

■ (Ta=25 Unless otherwise specified)

Device marking code			A1
Repetitive peak reverse voltage	VRRM	V	100

~ I e.r " e "

	FSM	A	2
Non-repetitive Surge peak forward current @ t=1ms square wave			1.5
Power dissipation	PD	mW	350

Junction temperature TJ -55 to +150 / × M Ĩ



BAW56

RoHS
COMPLIANT



BAW56

RoHS
COMPLIANT

BAW56	F2	Approximate 0.008	3000	30000	120000	7" reel
BAW56	F4	Approximate 0.008	10000	/	210000	13 i f ox

