



- z Moisture sensitivity level 1
- z Halogen free and RoHS compliant
- z Surface mount package ideally suited for automatic insertion

- z Signal amplification
- z Switching circuit

z SOT-363

z Tin plated leads, solderable per J-STD-002 and JESD22-B102

■ (T_a=25 Unless otherwise specified)

Device marking code				1G
Collector-base voltage	V _{CBO}	V	I _C =10uA, I _E =0	50
Collector-emitter voltage	V _{CEO}	V	I _C =10mA, I _B =0	45
Emitter-base voltage	V _{EBO}	V	I _E =10uA, I _C =0	6
Collector current	I _C	mA		100

Storage temperature	T _{STG}	-		-55 to +150
---------------------	------------------	---	--	-------------




RoHS

COMPLIANT



RoHS

COMPLIANT

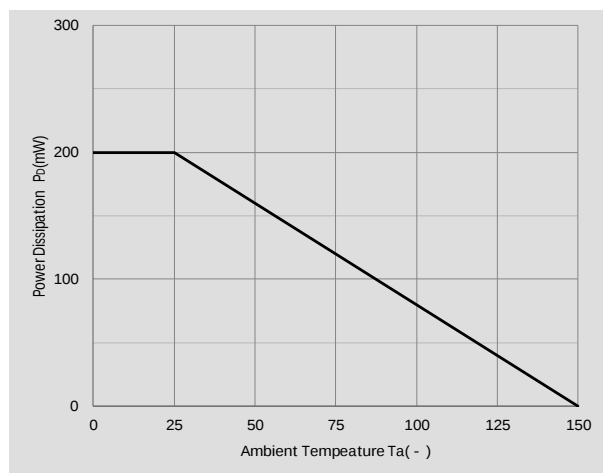



RoHS

COMPLIANT





RoHS

COMPLIANT