


PNP General Purpose Amplifier

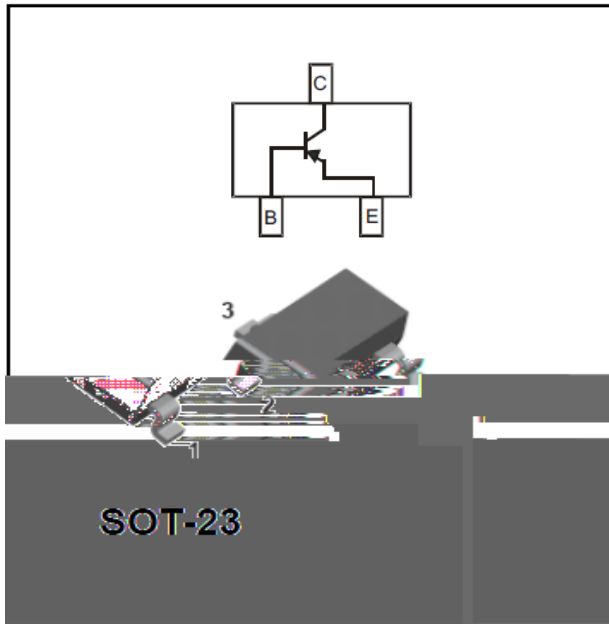

Features

- Epoxy meets UL-94 V-0 flammability rating
- Halogen free available upon request by adding suffix "HF"
- Moisture Sensitivity Level 1
- Marking: 2T

■ Maximum Ratings (Ta=25 unless otherwise noted)


Item	Symbol	Unit	Value
Collector-Base Voltage	V_{CBO}	V	-40
Collector-Emitter Voltage	V_{CEO}	V	-40
Emitter-Base Voltage	V_{EBO}	V	-5
Collector Current	I_C	A	-0.6
Collector Power Dissipation	P_C	mW	300
Thermal Resistance From Junction To Ambient	$R_{\theta JA}$	- /W	417
Operation Junction Temperature	T_J	-	-55 to +150

Storage Temperature: -55 to +150 °C

		UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
MMBT4403	F2	Approximate 0.008	3000	30000	120000	7" reel

MMBT4403

■SOT-23 Package Outline Dimensions

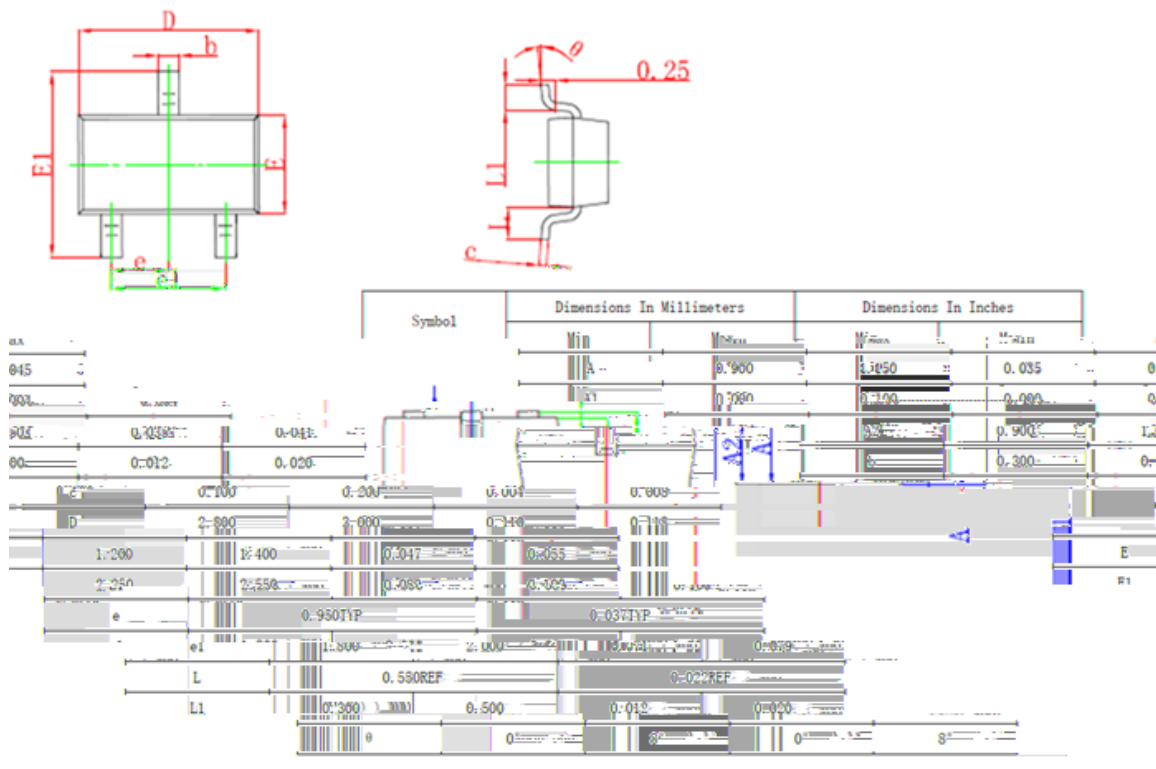

■SOT-23 Soldering Footprint

