




MMSTA05 THRU MMSTA06

RoHS
COMPLIANT




Characteristics

Static Characteristic

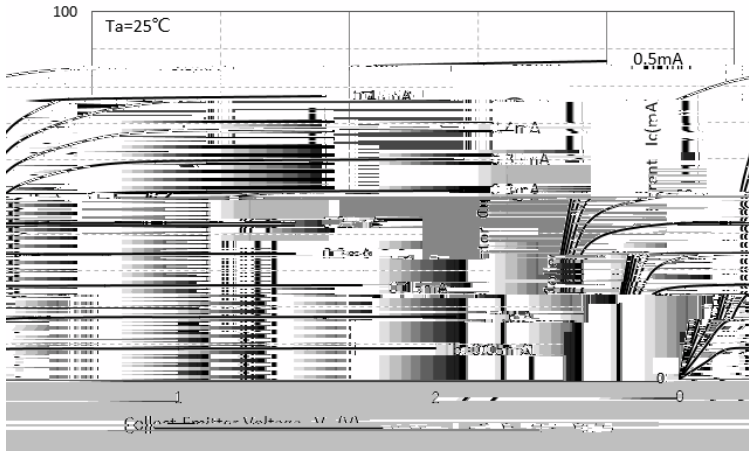


DC Current Gain

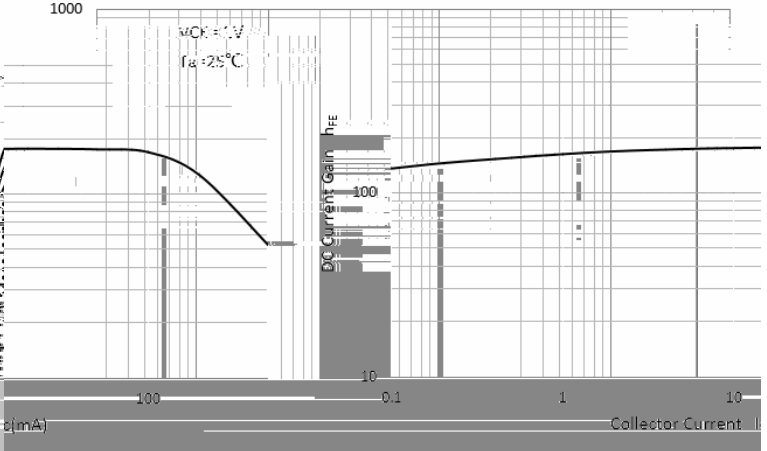


Collector-Emitter Saturation Voltage




Base-Emitter Saturation Voltage

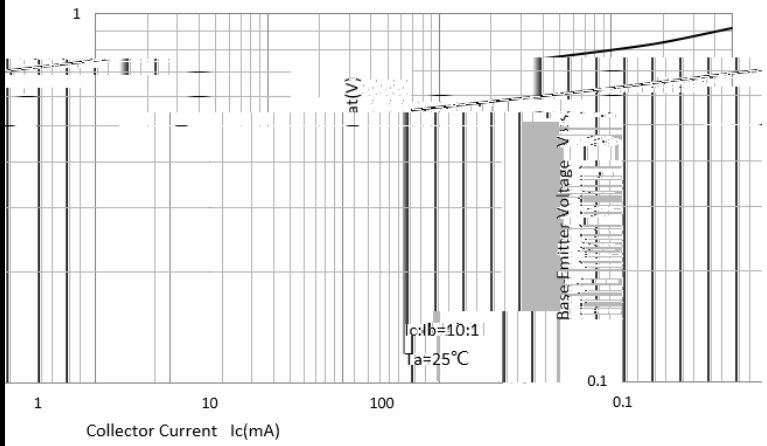

Base-Emitter On Voltage

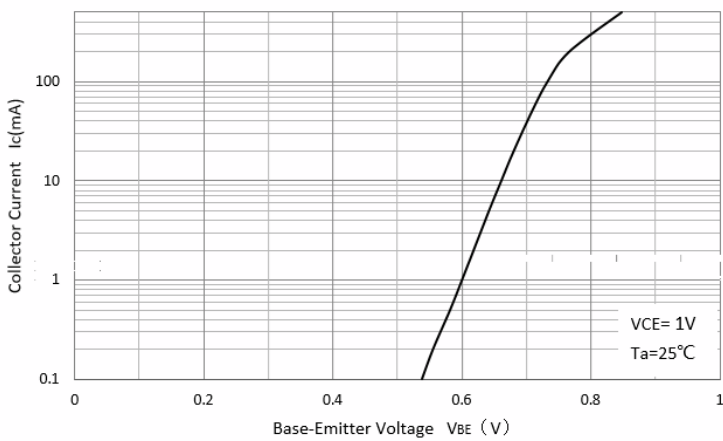

Cob/Cib-Vcb/Veb

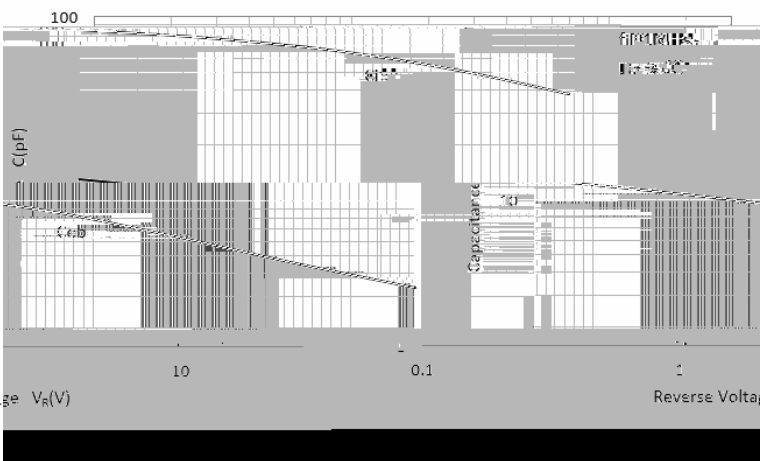




MMSTA05 THRU MMSTA06


RoHS
COMPLIANT

SOT-323 Package Outline Dimensions

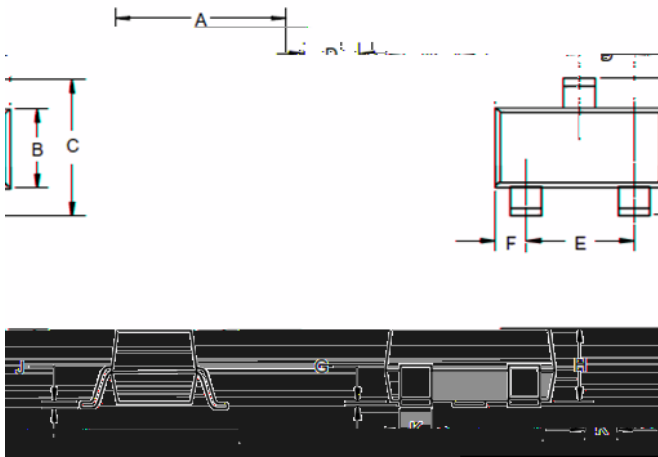

DIMENSIONS					
DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.071	.087	1.80	2.20	
B	.025	.033	0.65	0.85	
C	.030	.033	0.76	0.85	
D	.026 Nominal		0.65 Nominal		
E	.047	.055	1.20	1.40	
F	.047	.055	1.20	1.40	
G	.010		0.25		
H	.035	.59	.95	1.90	
J	.014	.070	.35	.250	
K	.006	.016	.15	.40	

SOT-323 Soldering Footprint

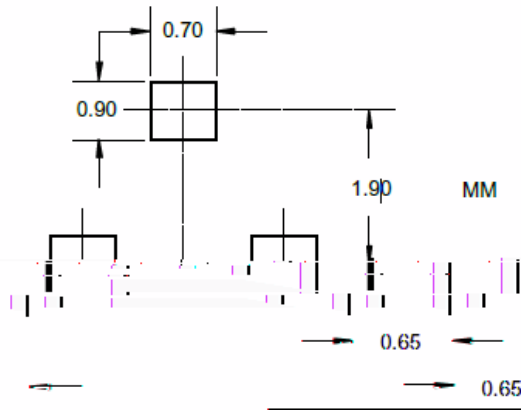



Disclaimer