



NPN General Purpose Amplifier

Features

- "Low collectoremitter saturation voltage
- "High current capability
- "Improved device reliability due to reduced heat generation
- "Epoxy meets UL94 V0 flammability rating
- "Halogen free available upon request by adding suffix "HF"
- "Moisture Sensitivity Level 1
- "Marking:3B

Applications

- "Supply line switching circuits
- "Battery management
- "DC-DC convertor
- "Strobe flash
- "Motor and lamp driver

Maximum Ratings (Ta=25 -)

Item	Symbol	Unit	Conditions	Value
CollectorEmitter Voltage	V_{CEO}	V	$I_C=1mA, I_B=0$	20
CollectorBase Voltage	V_{CBO}	V	$I_C=100\mu A, I_E=0$	30
EmitterBase Voltage	V_{EBO}	V	$I_E=100\mu A, I_C=0$	5
Collector Current	I_C	A		1
Collector Power Dissipation	P_C	mW		300
Thermal Resistance From Junction To Ambient	R_{JA}	- /W		417










PBSS4120T

Electrical Characteristics $T_a=25^\circ\text{C}$

Item	Symbol	Unit	Conditions	Min	Max
Collector-Emitter Voltage	V_{CEO}	V	$I_C=1\text{mA}, I_B=0$	20	
Collector-Base Voltage	V_{CBO}	V	$I_C=100\mu\text{A}, I_E=0$	30	
Emitter-Base Voltage	V_{EB0}	V	$I_E=100\mu\text{A}, I_C=0$	5	
Collector-base Cutoff Current	I_{CBO}	nA	$V_{CB}=30\text{V}$		100
Base-emitter Cutoff Current	I_{EB0}	nA	$V_{EB}=4\text{V}$		100
DC Current Gain	h_{FE}		$I_C=100\text{mA}, V_{CE}=2\text{V}$	350	
			$I_C=500\text{mA}, V_{CE}=2\text{V}$	300	
			$I_C=1\text{A}, V_{CE}=2\text{V}$	280	
Collector-Emitter Saturation Voltage	$V_{CE(sat)1}$	mV	$I_C=100\text{mA}, I_B=1\text{mA}$		80
	$V_{CE(sat)2}$	mV	$I_C=500\text{mA}, I_B=50\text{mA}$		110
	$V_{CE(sat)3}$	mV	$I_C=750\text{mA}, I_B=15\text{mA}$		200
	$V_{CE(sat)4}$	mV	$I_C=1\text{A}, I_B=50\text{mA}$		250
Equivalent On-Resistance	$R_{CE(sat)}$	m Ω	$I_C=500\text{mA}, I_B=50\text{mA}$		220
Base-Emitter Saturation Voltage	$V_{BE(sat)}$	V	$I_C=1\text{A}, I_B=100\text{mA}$		1.1
Base-Emitter Turn-On Voltage	$V_{BE(on)}$	V	$I_C=100\text{mA}, V_{CE}=2\text{V}$		0.75
Transition frequency	f_T	MHz	$I_C=100\text{mA}, V_{CE}=10\text{V}, f=100\text{MHz}$	100	
Collector Capacitance	C_{ob}	pF	$V_{CB}=10\text{V}, I_E=0, f=1\text{MHz}$		20

Characteristics (Typical)

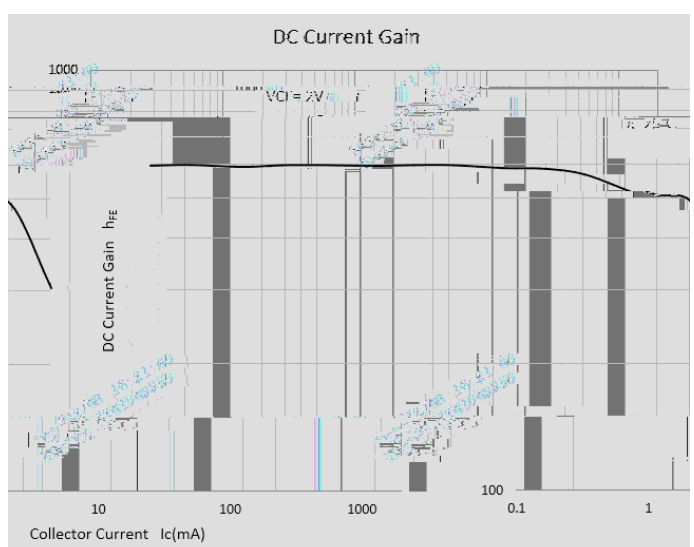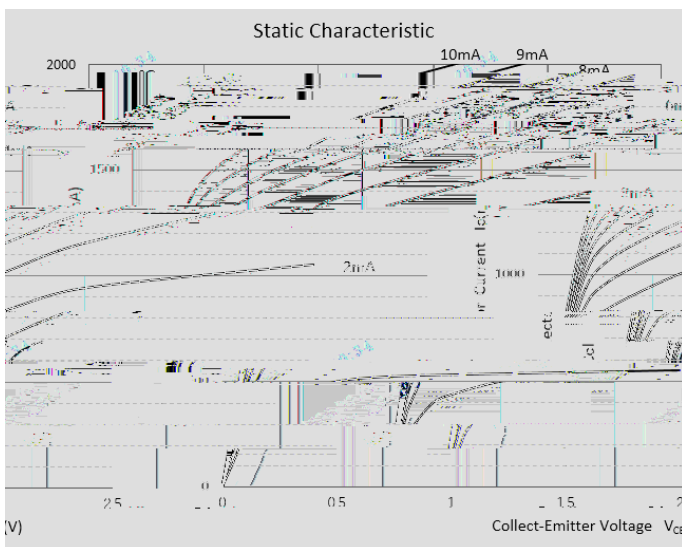

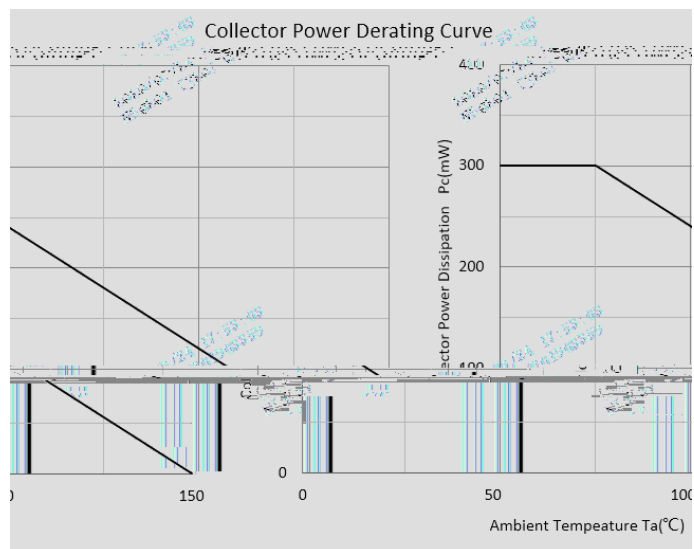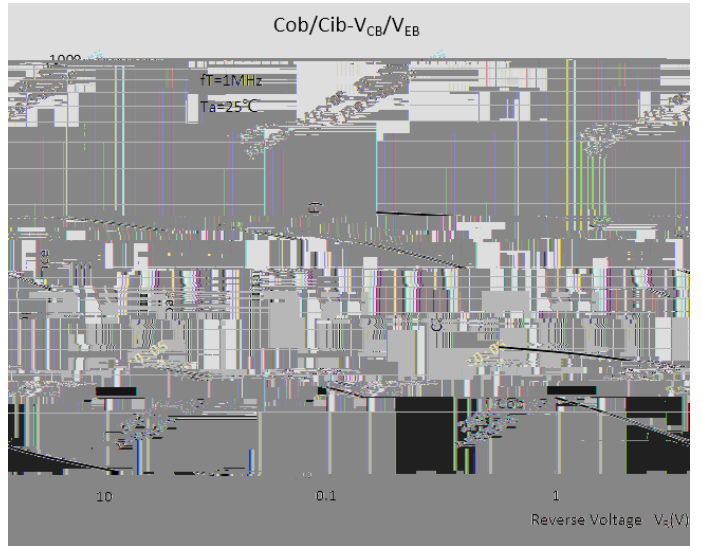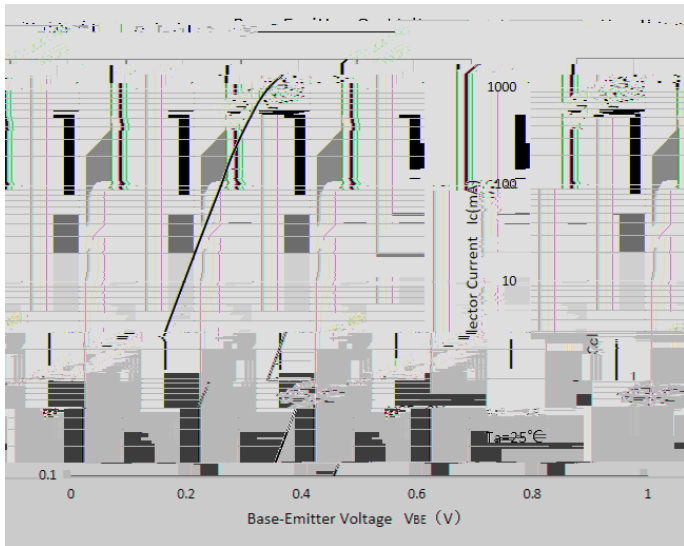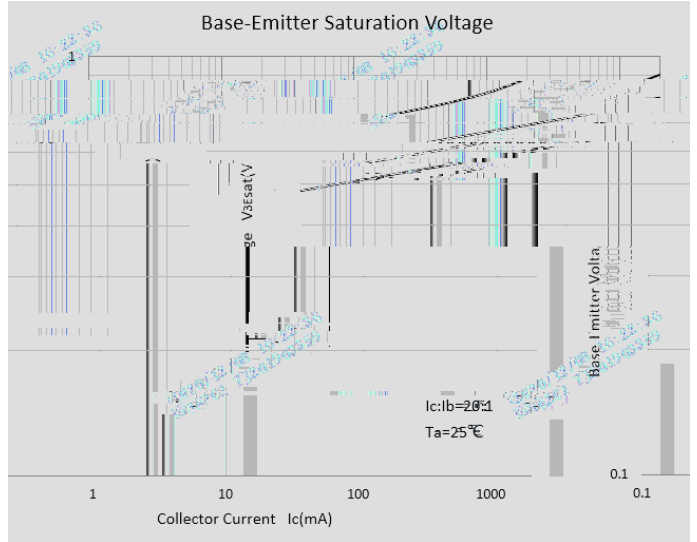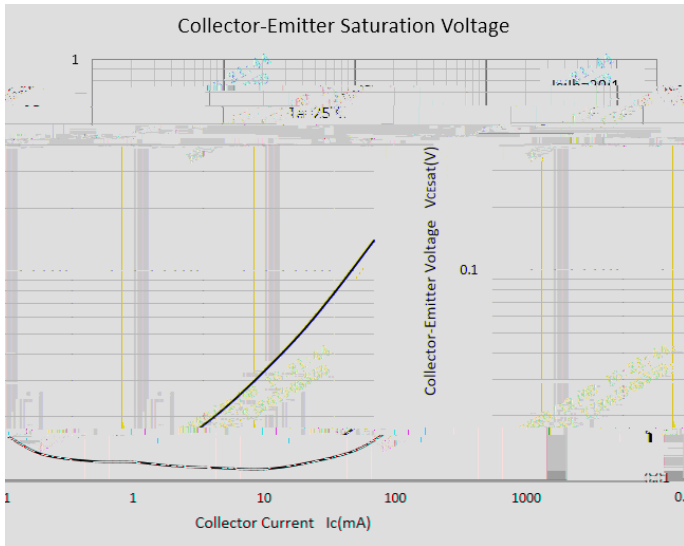

VSOT-23 Package Outline Dimensions

VSOT-23 Soldering Footprint



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability/section or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear reactor controllers/rel controllers and other safety devices), Yangjie or any of its subsidiaries, affiliates, agents, representatives, distributors, or licensors. Yangjie and its subsidiaries, affiliates, agents, representatives, distributors, or licensors shall not be held responsible for any damages, losses, or liabilities arising from the use of the product.