



M1 THRU M7

Surface Mount General Purpose Rectifier

Features

- Low profile package
- Ideal for automated placement
- Glass passivated chip junction

Typical Applications: Su Id i i

For use in general purpose rectification of power supplies, inverters, converters, and freewheeling diodes for consumer and telecommunication.

Maximum Ratings (Ta=25 Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	M1	M2	M3	M4	M5	M6	M7
Device marking code			M1	M2	M3	M4	M5	M6	M7
Maximum Repetitive Peak Reverse Voltage	VRRM	V	50	100	200	400	600	800	1000
Maximum RMS Voltage	VRMS	V	35	70	140	280	420	560	700
Maximum DC blocking Voltage	VDC	V	50	100	200	400	600	800	1000
Average rectified output current @60Hz sine wave, Resistance load, TL (FIG.1)	IO	A	1.0						
Forward Surge Current (Non-repetitive) @60Hz Half-sine wave, 1 cycle, Tj=25	IFSM	A	30						
Forward Surge Current (Non-repetitive) @1ms, square wave, 1 cycle, Tj=25			60						
Current squared time @1ms t 8.3ms Tj=25	I ² t	A ² s	3.7						
Storage temperature	Tstg		-55 ~ +150						
Junction temperature	Tj		-55 ~ +150						

Electrical Characteristics Ta=25 Unless otherwise specified

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	M1	M2	M3	M4	M5	M6	M7
Maximum instantaneous forward voltage	VF	V	IFM=1-	V						



M1 THRU M7

Thermal Characteristics $T_a=25$ Unless otherwise specified

PARAMETER	SYMBOL	UNIT	M1	M2	M3	M4	M5	M6	M7
Typical Thermal Resistance	R J-A(1)	/W	75						
	R J-L(1)	/W	25						
	R J-C(1)	/W	20						


Note

(1) Thermal resistance from junction to ambient and from junction to lead mounted on P.C.B. with 0.2" x 0.2" (5.0 mm x 5.0 mm) copper pad areas

Ordering Information (Example)

PREFERRED P/N	PACKAGE CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
M1-M7	F1	Approximate 0.059	5000	/	80000	13" reel
M1-M7	F2	Approximate 0.059	7500	/	120000	13" reel
M1-M7	F3	Approximate 0.059	7500	/	60000	13" reel
M1-M7	F4	Approximate 0.059	1800	14400	57600	7" reel
M1-M7	F5	Approximate 0.059	2000	16000	64000	7" reel
M1-M7	F6	Approximate 0.059	5000	/	100000	13" reel

Characteristics (Typical)

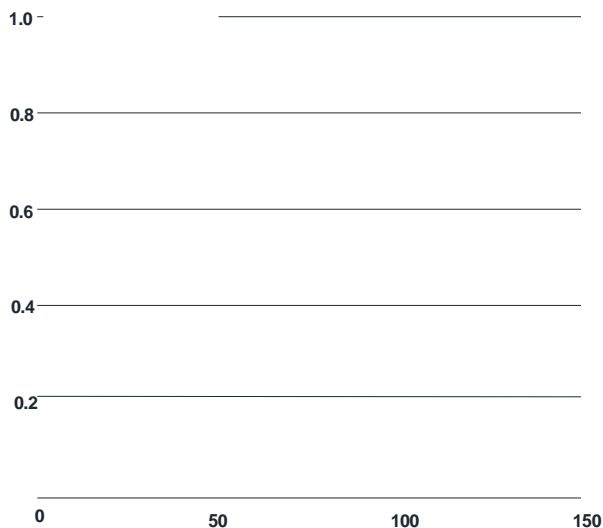

M1 THRU M7

M1 THRU M7
