

# ZP1100- RECTIFIER DIODE

Jiangsu Yangjie Runau Semiconductor Co.,Ltd

1800-2400V<sub>RRM</sub>


\*\*\*\*\*

## GENERAL PURPOSE HIGH POWER STANDARDRECTIFIER

### Features:

- . All diffused structure
- . High surge rating
- . Blocking capability up to 2400 volts
- . Ceramic housing hermetic package
- . Pressure assembled device

ZT40cT

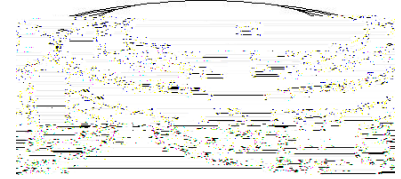

## ELECTRICAL CHARACTERISTICS AND RATINGS

### Reverse Blocking

$V_{RRM}$  = Repetitive peak reverse voltage

$V_{RSM}$  = Non repetitive peak reverse voltage (2)

---

Repetitive peak reverse leakage current	$I_{RRM}$	2 mA 60 mA (3)
---	-----------	-------------------

