



Maximum Ratings $\overline{D}$ 8 Q O H V V R W K H U ~~A~~ L V H V S H F L I L H G

			& 21',7,216	0 % 5 & 76
0D[LPXP LQVWDQWQHRXYJRUZDUG YROWDJH GURS SHU GLRGH)	0	\$		QEAg*

\$dDQKQY @ DQGDQBJKWX & BQJMLH YWQRQWORLD & R /ZG \DQJMLH I
" *XDUD S8 72 \$%
DGLQJ FRPSR8/QG PHHWDVPPDELOLW\



MBR3045CTS

Thermal Characteristics 7D 8QOHVV RWKHUÄLVH VSHFLILHG

PARAMETER		SYMBOL	UNIT	MBR3045CTS
7KHUPDO 5HVLVWDQFH	%HWZHHQ 5MXQFWLRQ ĐQG FDVH			

Ordering Information ([DP SOH

PREFERRED P/N	UNIT WEIGHT(g)	MINIIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
0 % 5 & 7 6	\$SSUR[LPDWH				

7XEH

Characteristics 7\SLFDO

FIG3: Forward Voltage



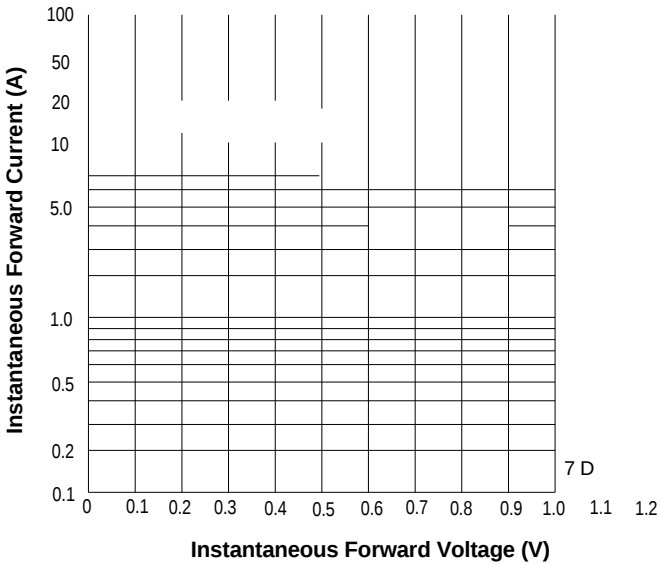


FIG.4: Typical Reverse Characteristics

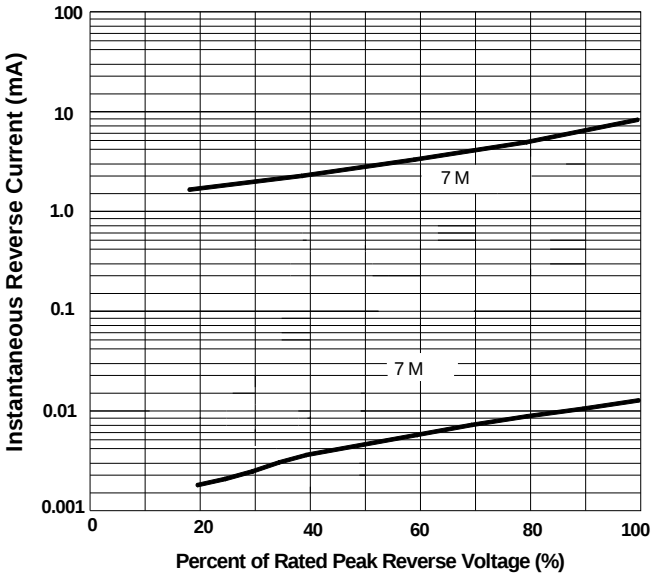

v2XWOLQH 'LPHQVLRQV

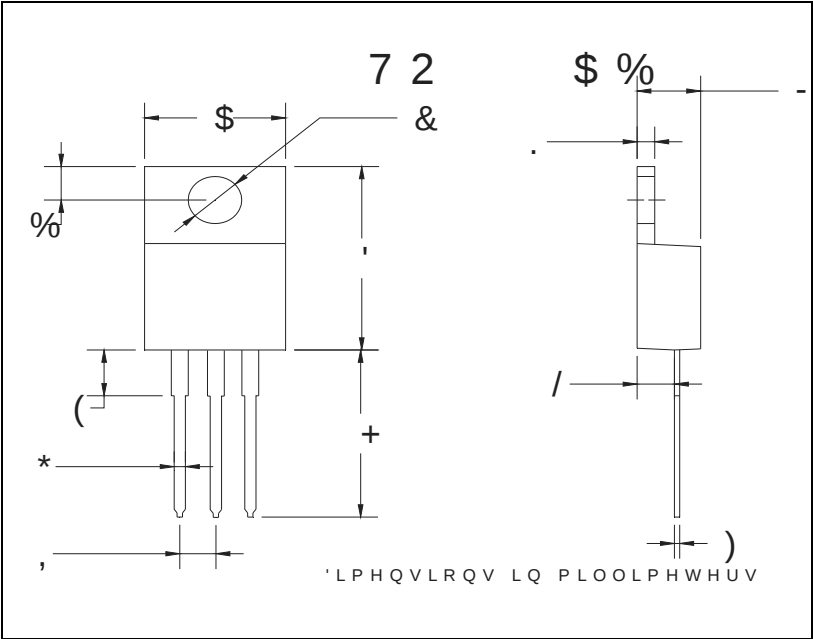

7 2 \$ %		
'LP	0 L Q	0 D
\$		
%		
&		
,		
(		
)		
*		
+		
,		
-		
.		
/		

