


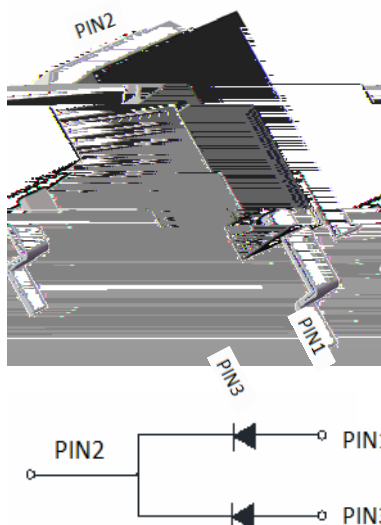

Typical Applications

Typical applications are in switching power supplies, converters, freewheeling diodes, and reverse battery protection.

Mechanical Data

- **Package:** TO-263
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** As marked

■Maximum Ratings ($T_a=25$ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	MBRB1045CTS
Device marking code			MBRB1045CTS
Repetitive Peak Reverse Voltage	V_{RRM}	V	45
Average Rectified Output Current @60Hz sine wave, R-load, T_c FIG.1	I_O	A	10
Surge(Non-repetitive)Forward Current @60Hz half sine-wave, 1 cscy	I_{FSM}	A	100
Current Squared Time @ $1ms \leq t \leq 8.3ms$ $T_j=25$	I^2t	A^2s	41
Storage Temperature	T_{stg}		-55 ~ +150
Junction Temperature	T_j		-55 ~ +150

■Electrical Characteristics $T_a=25$ Unless otherwise specified

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	MBRB1045CTS
Maximum instantaneous forward voltage drop per diode	V_{FM}	V	$I_{FM}=5.0A$	0.65
Maximum DC reverse current at rated DC blocking voltage per diode	I_{RRM1}	mA	$V_{RM}=V_{RRM}$ $T_a=25$	0.2
	I_{RRM2}		$V_{RM}=V_{RRM}$ $T_a=100$	20


Note1:Pulse test:300uS pulse width,1% duty cycle

Note2:Pulse test:pulse width 40mS






■Outline Dimensions

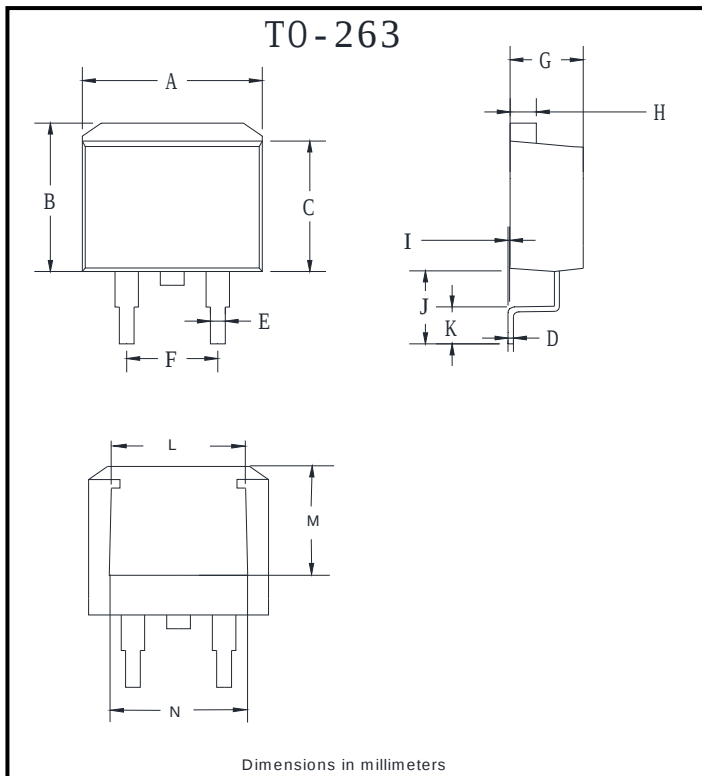

TO-263		
Dim	Min	Max
A	9.5	11.5
B	9.7	10.5
C	8.4	9.0
D	0.28	0.64
E	0.68	0.94
F	4.55	5.6
G	4.04	5.10
H	1.14	1.4
I	0	0.2
J	4.9	6.05
K	1.79	2.79
L	7.3	7.9
M	6.2	6.8
N	7.6	8.2

■Suggested Pad Layout

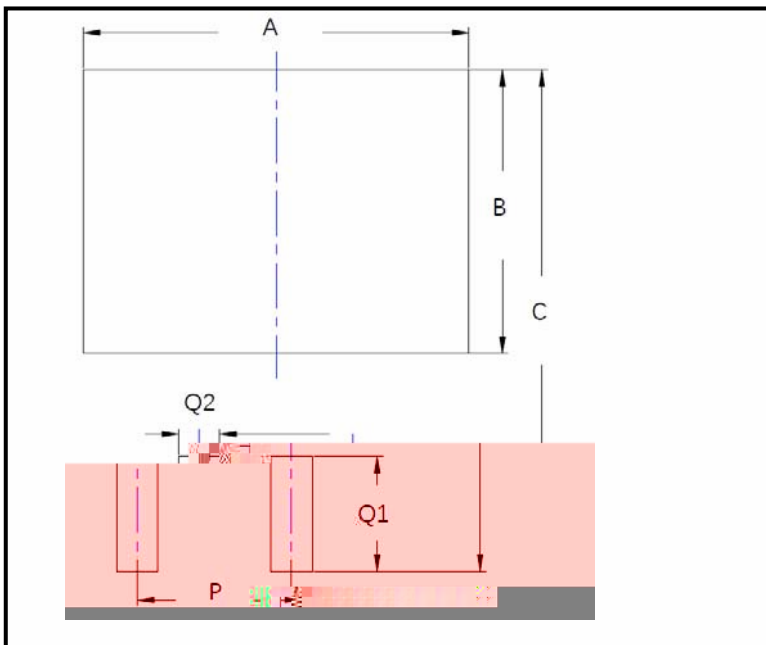

Dim	Millimeters
A	12.7
B	9.4
C	16.6
P	5.08
Q1	3.8
Q2	1.35



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.