
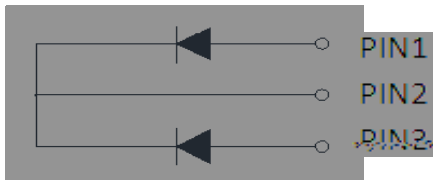


## Schottky Diodes

### Features

- High frequency operation
- Low forward voltage drop
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Guard ring for enhanced ruggedness and long term reliability
- Solder dip 275 °C max. 7 s, per JESD 22-B106

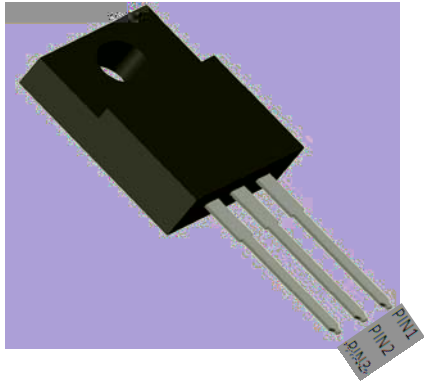

### Typical Applications

Typical applications are in switching power supplies, converters, freewheeling diodes, and reverse battery protection.

### Mechanical Data

**Package:** ITO-220AB

Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant

**Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102

**Polarity:** As marked

### Maximum Ratings (T<sub>j</sub>=25 °C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	MBRL2060FCT
Device marking code			MBRL2060FCT

Repetitive Peak Reverse Voltage	V <sub>RPM</sub>	V	60
		@1ms square wave, 1 time, T <sub>j</sub> =25	

Current Squared Time @1ms t 8.3ms T <sub>j</sub> =25	I <sup>2</sup> t	A <sup>2</sup> s	94
Typical junction capacitance @ 1MHz and Applied Reverse Voltage of 4.0 V.D.C.	C <sub>j</sub>	pF	850
Storage Temperature	T <sub>stg</sub>		-55 ~ +150
Junction Temperature	T <sub>j</sub>		-55 ~ +150
Dielectric strength @ terminals to case, AC 1 minute	V <sub>dis</sub>	KV	2.0
Mounting torque @ recommend torque 5kg cm	Tor	kg cm	8



# MBRL2060FCT

## Electrical Characteristics $T_j=25$ Unless otherwise specified

PARAMETER	SYMBOL			Min	Typ	Max
Peak Forward Voltage	$V_{FM}$	V	$I_{FM}=10.0A$ $T_j=25$	0.5	0.57	0.60
			$I_{FM}=10.0A$ $T_j=125$	-	0.54	0.58
Maximum DC reverse current at rated DC blocking voltage per diode	$I_{RRM1}$	uA	$V_{RM}=V_{RRM}$ $T_j=25$	-	-	100
	$I_{RRM2}$	mA	$V_{RM}=V_{RRM}$ $T_j=125$	-	-	20

Note1:Pulse test:300uS pulse width,1% duty cycle

Note2:Pulse test:pulse width 40mS

## Thermal Characteristics $T_j=25$ Unless otherwise specified

PARAMETER



**Outline Dimensions**

<b>ITO-220AB</b>		
Dim	Min	Max
A	9.8	10.2
B	2.25	2.75
C	2.95	3.45
D	14.75	15.25
E	3.05	3.95
F	0.45	0.75
G	0.45	0.75
H		



# MBRL2060FCT

---

## Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herei