



Bridge Rectifiers



Features

- UL recognition, file #E230084
- Thin single in-line package
- Glass passivated chip junction
- High surge current capability
- Solder dip 275 °C max

Typical Applications

General purpose use in AC/DC bridge full wave rectification for switching power supply, home appliances, office equipment, industrial automation applications.

Mechanical Data

- **Package:** 6KBJ
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** As marked on body

■Maximum Ratings ($T_a=25^{\circ}\text{C}$ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	GBJ3516A
Device marking code			GBJ3516A
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	V	1600
Maximum RMS Voltage	V_{RMS}	V	1120
Maximum DC blocking Voltage	V_{DC}	V	1600

Average rectified output
current
@60Hz sine wave, R-load


Dielectric strength @ Terminals to case, AC 1 minute	V_{dis}	KV	2.5
Mounting torque @Recommend torque 5kg cm	Tor	kg cm	8



■Electr	Lt eM M	No 2	No
---------	---------	------	----



■ Outline Dimensions

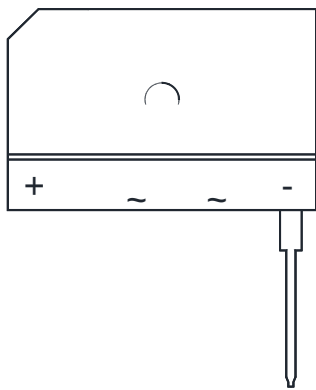

Dimensions in millimeters

6KBJ		
Dim	Min	Max
A	29.7	30.3
B	19.7	20.3
C	17.0	18.0
D	4.8	5.8
E	3.8	4.2
F	7.3	7.7
G	9.8	10.2
H	0.9	1.1
I	2.0	2.4
J	2.3	2.7
K	3.4	3.8
L	4.4	4.8
M	10.8	11.2
N	3.1	3.7
O	3.1	3.4
P	0.6	0.8



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.