






Device marking code			RABS210A
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	V	1000
Maximum RMS Voltage	$V_{RMS}$	V	700
Maximum DC blocking Voltage	$V_{DC}$	V	1000
Average rectified output current @60Hz sine wave, R-load, $T_c=108$	$I_o$	A	2.0
Forward Surge Current (Non-repetitive) @60Hz Half-sine wave, 1 cycle, $T_j=25$	$I_{FSM}$	A	60
Forward Surge Current (Non-repetitive) @1ms, square wave, 1 cycle, $T_j=25$			120
Current squared time @1ms $t < 8.3ms$ $T_j=25$ Rating of per diode	$I^2t$	$A^2s$	14.9
Storage temperature	$T_{stg}$		-55 ~ +150
Junction temperature	$T_j$		-55 ~ +150

á Q ° á r




---

Ta

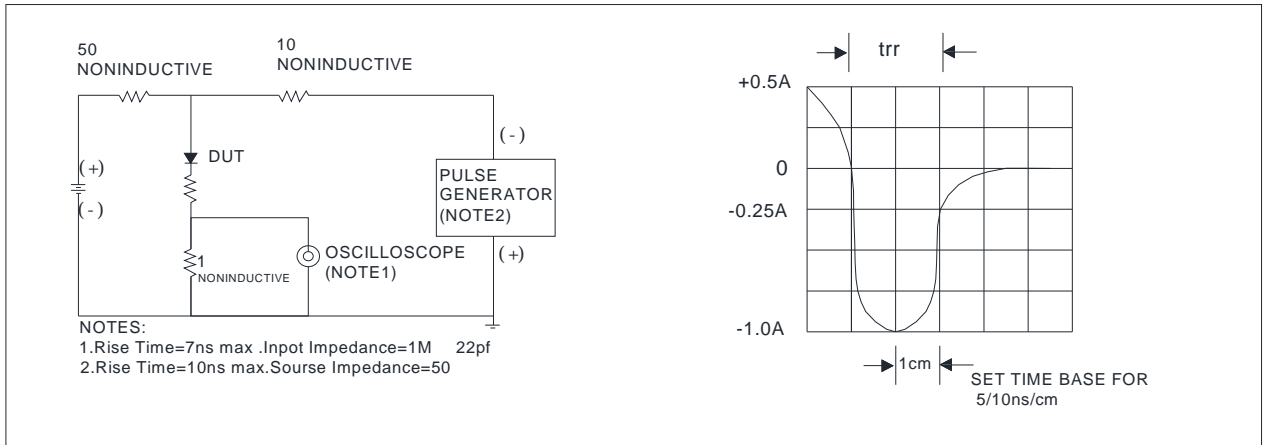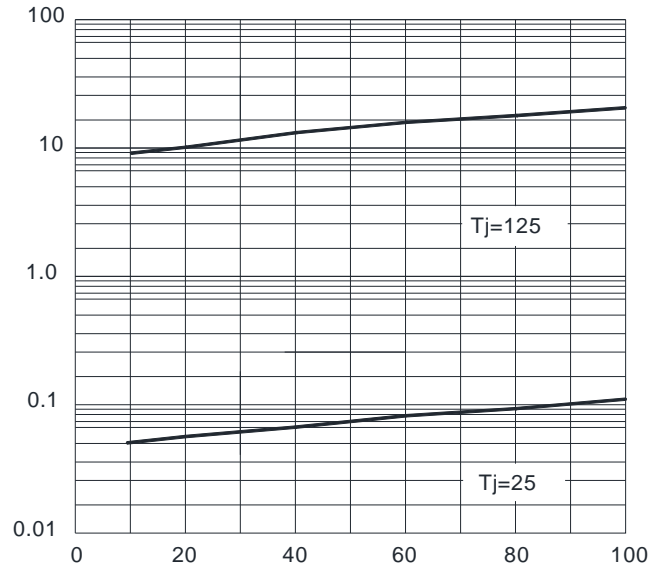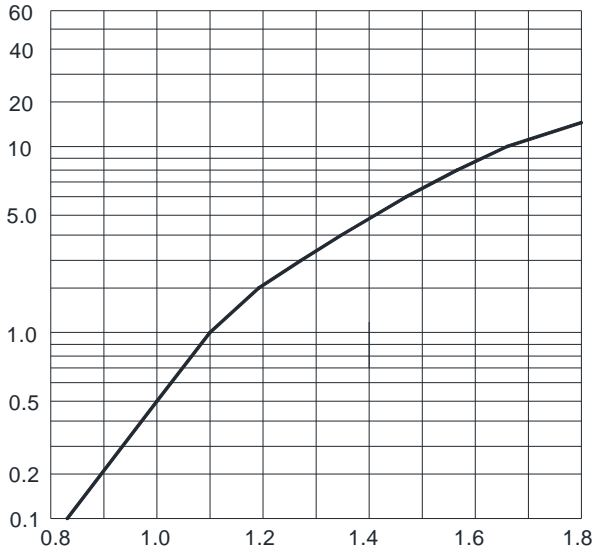



ABS



Dimensions in millimeters

Dim	Min	Max
A	4.30	4.50
B	6.00	6.40
C	3.90	4.10
D	4.90	5.10
E	1.25	1.45
F	1.60 Max	
G	0.60	0.70
H	0.15	0.25
I	0.30	0.80
J	0.02	0.15

P1	5.72
P2	4.00
Q1	1.00
Q2	0.90



The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed here in order to improve reliability, performance, design or otherwise.

The product listed here is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require a high level of reliability, the malfunction of which could directly endanger human life (such as medical instruments, transport equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and safety devices) or Yangjie or any other person's life. Yangjie does not assume any responsibility for any damages resulting from such improper use of sale.

This publication includes all information. Please refer to the latest Yangjie's sales office for maintenance.  
http:// [www.21yangjie.com](http://www.21yangjie.com) , or consult our nearest Yangjie's sales office for maintenance.