

Fast Recovery Bridge Rectifier

Features

- UL recognition, file #E230084
- Glass passivated chip junction
- Ideal for printed circuit boards
- High surge current capability
- Solder dip 275 °C max. 7 s, per JESD 22-B106

Typical Applications

General purpose use in AC/DC bridge full wave rectification for monitor, TV, printer, power supply, switching mode power supply, adapter, audio equipment, and home appliances applications.

Mechanical Data

- **Package:** GBU
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** As marked on body

■ **Maximum Ratings** (T_a=25 °C Unless otherwise specified)

	Without heatsink Ta =25			3.0
Forward Surge Current (Non-repetitive) @60Hz Half-sine wave,1 cycle, Tj=25		IFSM	A	175
Forward Surge Current (Non-repetitive) @1ms, square wave, 1 c !	S	Mounting torque		
@Recommend torque 5kg cm		Tor	kg cm	8

■Electrical Characteristics $T_a=25$ Unless otherwise specified

PARAMETER	Ö ð] ´ ° L'~%1y,v]`'#SM Ö Ö Ð" 'ö85İÐ	.5	\$
-----------	---	----	----



RGBU1010

■ Thermal Characteristics $T_a=25$ Unless otherwise specified





PARAMETER		SYMBOL	UNIT	RGBU1010
Thermal Resistance	Between junction and ambient, Without heatsink	$R_{\theta J-A}$	$^{\circ}W$	25.0
	Between junction and case, With heatsink	$R_{\theta J-C}$		1.5

Note: Device mounted on 75mm x 45mm x 5.5mm Aluminum Plate Heatsink.

■ Ordering Information (Example)

PREFERRED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
RGBU1010	B1	Approximate 3.96	20	1000	2000	TUBE

■ Characteristics (Typical)

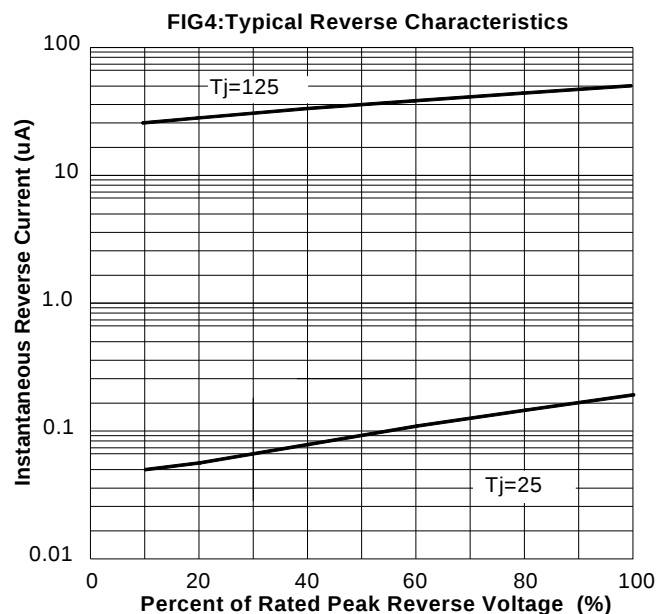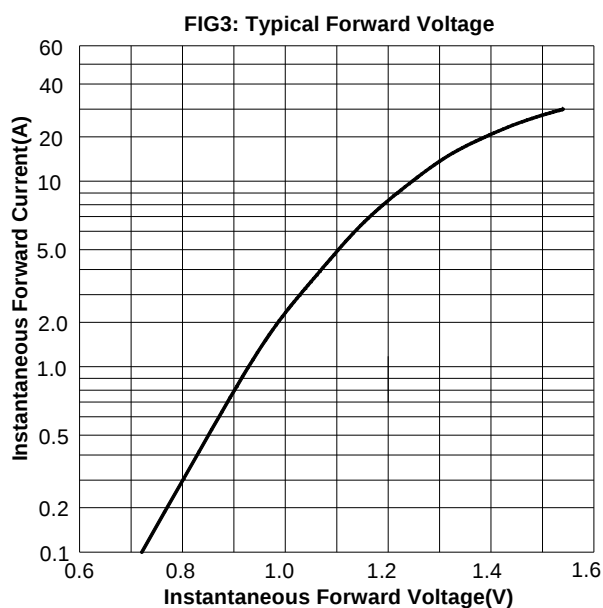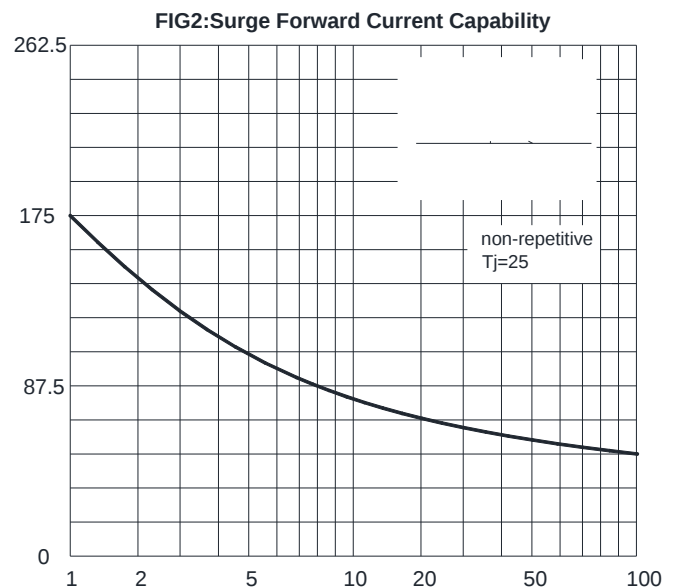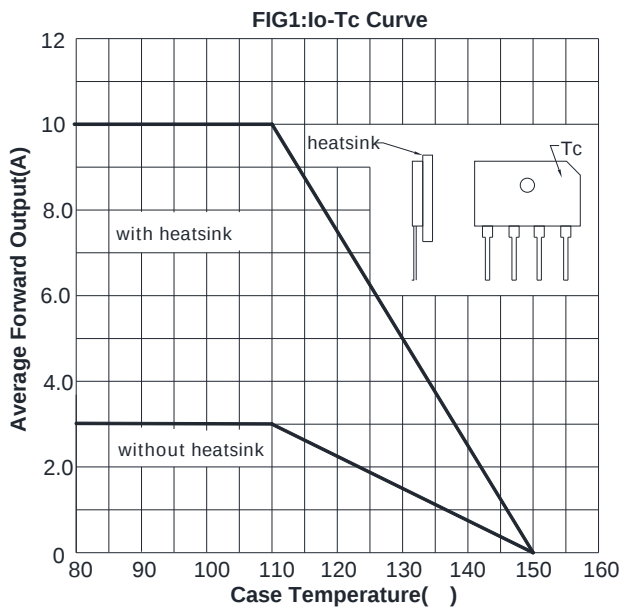



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.