




SKBPC7506 THRU SKBPC7516

RoHS
COMPLIANT

Thermal Resistance

Polarity:

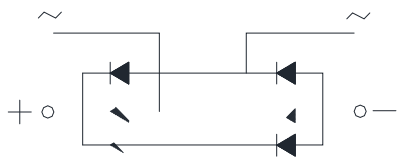

Maximum Ratings

Å

PARAMETER	SYMBOL	UNIT	SKBPC7506	SKBCP7508	SKBPC7510	SKBPC7512	SKBPC7514	SKBPC7516

		-	
Ö			



SKBPC7506 THRU SKBPC7516

Electrical Characteristics

Ä

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	SKBPC7506	SKBCP7508	SKBPC7510	SKBPC7512	SKBPC7514	SKBPC7516
			-						
			-						

Thermal Characteristics

Ä

PARAMETER	SYMBOL	UNIT	SKBPC7506	SKBCP7508	SKBPC7510	SKBPC7512	SKBPC7514	SKBPC7516
			-					

Ordering Information

PREFERED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE

Characteristics

FIG1:Io-Tc Curve


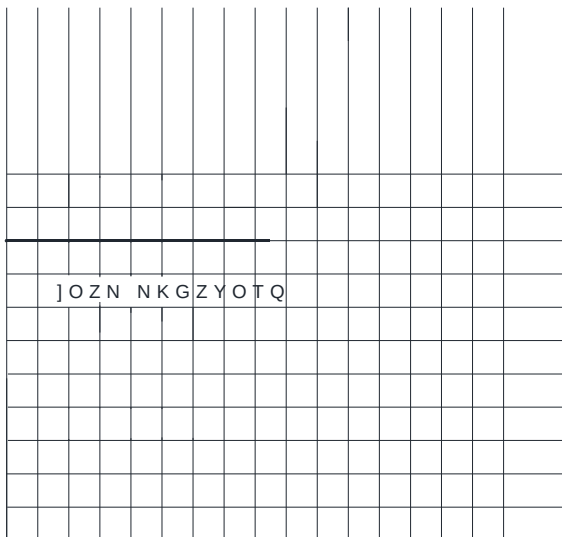




FIG4:Typical Reverse Characteristics

[illegible]

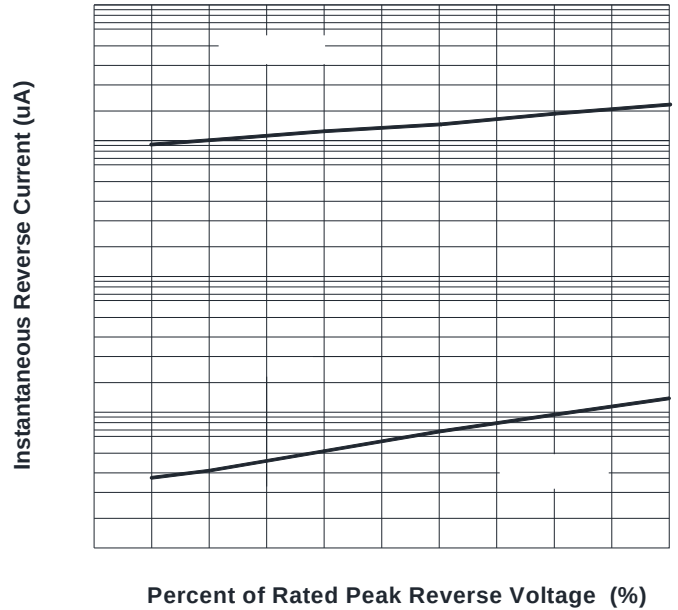