


UL recognition, file #E313149
 Glass passivated chip junction
 Ideal for automated placement
 High surge current capability
 Meets MSL level 1, per J-STD-020, LF maximum peak of 260 °C

General purpose use in AC/DC bridge full wave rectification for SMPS, lighting ballaster, adapter, battery charger, home appliances, office equipment, and telecommunication applications.

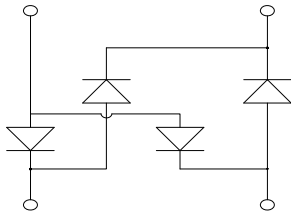

: YBS3

Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant, Halogen-free

: Tin plated leads, solderable per

J-STD-002 and JESD22-B102

As marked on body

($T_a=25$ Unless otherwise specified)

Device marking code			YBSM60005	YBSM6001	YBSM6002	YBSM6004	YBSM6006	YBSM6008	YBSM6010
Maximum Repetitive Peak Reverse Voltage	VRRM	V	50	100	200	400	600	800	1000
Maximum RMS Voltage	VRMS	V	35	70	140	280	420	560	700
Maximum DC blocking Voltage	VDC	V	50	100	200	400	600	800	1000
Average rectified output current @60Hz sine wave, R-load, $T_c=80$	IO	A	6.0						
Forward Surge Current (Non-repetitive) @60Hz Half-sine wave, 1 cycle, $T_j=25$	IFSM	A	150						
Forward Surge Current (Non-repetitive) @1ms, square wave, 1 cycle, $T_j=25$			300						
Current squared time @1ms t 8.3ms $T_j=25$ Rating of per diode	I ² t	A ² s	93.4						
Storage temperature	Tstg		-55 ~ +150						
Junction temperature	Tj		-55 ~ +150						

Maximum instantaneous forward voltage drop per diode	V _F	V	IFM=3.0A	1.0
Maximum DC reverse current at rated DC blocking voltage per diode	I _R	μA	T _j =25	5
			T _j =125	100
Typical junction capacitance	C _j	pF	Measured at 1MHz and Applied Reverse Voltage of 4.0 V.D.C	50



T_a=25 Unless otherwise specified


Typical Thermal Resistance	Between Junction and Ambient	R _{J-A}	/W	55					
	Between Junction and Lead	R _{J-L}		10					
	Between Junction and Case	R _{J-C}		6					


Note: Device mounted on P.C.B with 35mm*25mm*1.7mm.

(Example)


YBSM60005 THRU YBSM6010	F1	Approximate 0.36	1800	3600	25200	13" Reel

(Typical)

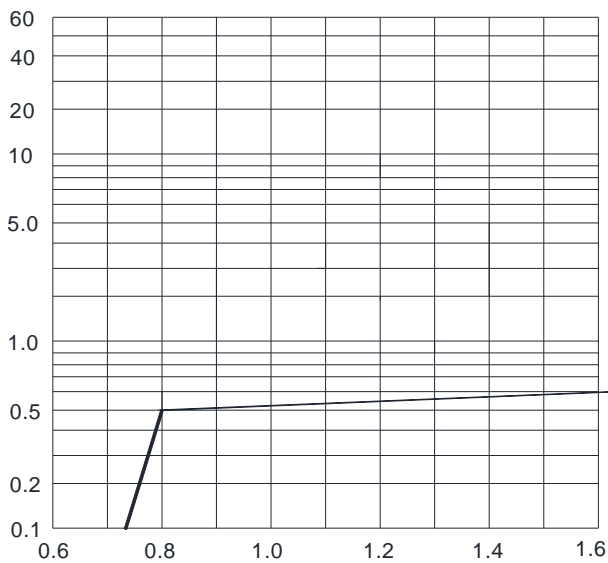

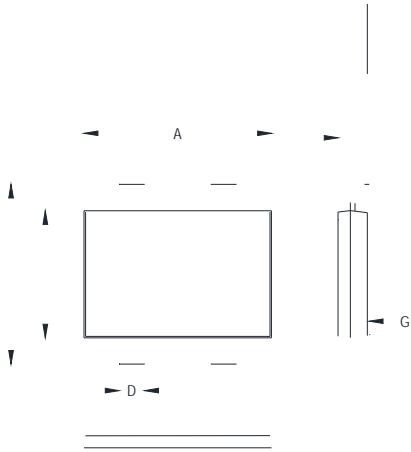

A	10.00	10.40
B	9.70	10.10
C	6.80	7.20
D	1.3	1.5
E	1.4	1.8
F	0.5	1.1
G	0	0.15
H	4.9	5.1
T	0.20	0.30

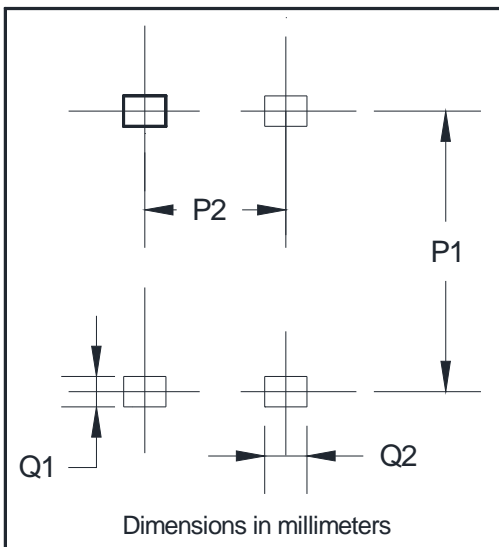

P1	9.25
P2	5.00
Q1	1.00
Q2	1.5



The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.