



Bridge Rectifiers

Features

- UL recognition, file #E313149
- Glass passivated chip junction
- Ideal for automated placement
- High surge current capability
- Meets MSL level 1, per J-STD-020, LF maximum peak of 260 °C

Typical Applications

General purpose use in AC/DC bridge full wave rectification for SMPS, lighting ballaster, adapter, battery charger, home appliances, office equipment, and telecommunication applications.

Mechanical Data

- **Package:** YBS3
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant, Halogen-free
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** As marked on body

■Maximum Ratings (T_a=25 Unless otherwise specified

PARAMETER	SYMBOL	UNIT	YBSM6016
Device marking code			YBSM6016
Maximum Repetitive Peak Reverse Voltage	VRRM	V	1600
Maximum RMS Voltage	VRMS	V	1120
Maximum DC blocking Voltage	VDC	V	1600
Average rectified output current @60Hz sine wave, R-load, T _c =80	I _O	A	6.0
Forward Surge Current (Non-repetitive) @60Hz Half-sine wave, 1 cycle, T _j =25	IFSM	A	150
Forward Surge Current (Non-repetitive) @1ms, square wave, 1 cycle, T _j =25			300
Current squared time @1ms≤t≤8.3ms T _j =25 Rating of per diode	I ² t	A ² s	93.4
Storage temperature	T _{stg}		-55 ~ +150
Junction temperature	T _j		-55 ~ +150

■Electrical Characteristics T_a=25 Unless otherwise specified

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	YBSM6016
Maximum instantaneous forward voltage drop per diode	V _F	V	I _{FM} =3.0A	1.0
Maximum DC reverse current at rated DC blocking voltage per diode	I _R	μA	T _j =25	5
			T _j =125	100
Typical junction capacitance	C _j	pF	Measured at 1MHz and Applied Reverse Voltage of 4.0 V.D.C	38



YBSM6016

■ Thermal Characteristics $T_a=25$ Unless otherwise specified

PARAMETER		SYMBOL	UNIT	YBSM6016
Typical Thermal Resistance	Between Junction and Ambient	$R_{\theta J-A}$	/W	60
	Between Junction and Lead	$R_{\theta J-L}$		15
	Between Junction and Case	$R_{\theta J-C}$		6

Note: Device mounted on P.C.B with 35mm*25mm*1.7mm.

■ Ordering Information (Example)

PREFERRED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
YBSM6016	F1	Approximate 0.35	1800	3600	25200	13" Reel

■ Characteristics (Typical)

FIG1: I_o - T_c Curve


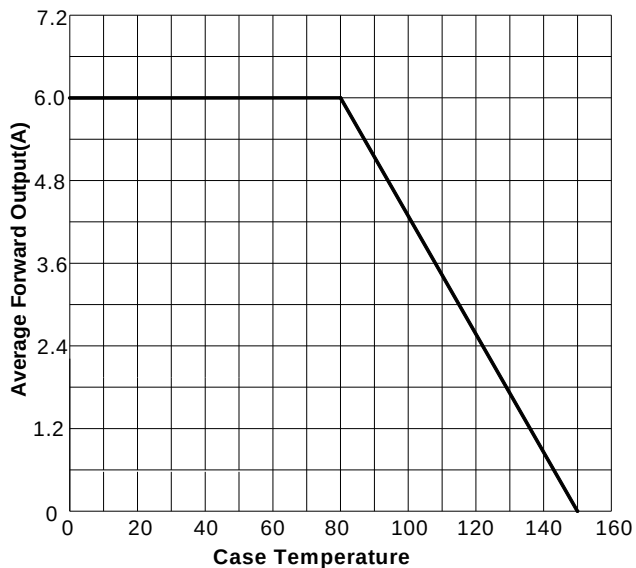


FIG4: Typical Reverse Characteristics



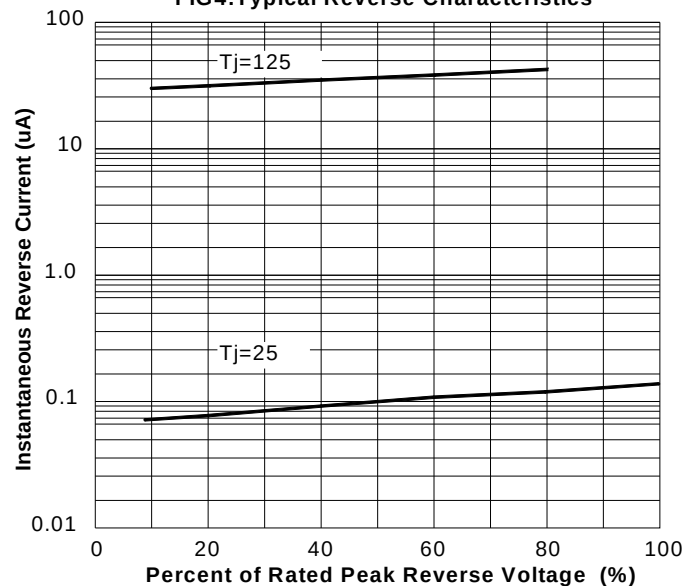

■ Outline Dimensions

YBS3		
Dim	Min	Max
A	10.00	10.40
B	9.70	10.10
C	6.80	7.20
D	1.3	1.5
E	1.4	1.8
F	0.5	1.1
G	0	0.15
H	4.9	5.1
T	0.20	0.30

■ Suggested pad layout



YBS3	
Dim	Min
P1	9.25
P2	5.00
Q1	1.00
Q2	1.5



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of t