


” “

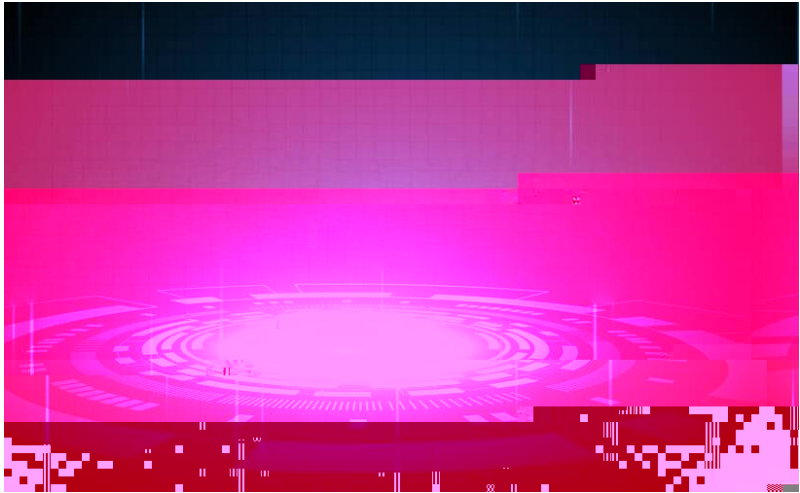

4
5
6

Wm

UrKV



4 Wm 483%

5

6

ZE



Sur gxfw Qd ph	Y _{UUP} +Y,	0r+D,	L _{IVP} +D,	Udwhg 0r+D,	YI+Y,	LU+xD,C 58%	LU+p D,C 458%	Wm %
V47W4								

NEW
PRODUCT

High Temperature Resistant Schottky Diode



t oŭŚŃŎŭ LŲóŭŚŃŎŭŲŲŲ

- 4 Or z ohdndjh dgg kljk Wm fdsdflw|
- 5 Xvh hqylurq phqwdoo| iulhqgo| pdwhuldov dgg frpsol| zlwk UrKV vwdqgdugv
- 6 Lw lv vxlwdeoh iru kljk0whp shudwxuh hqylurq phqvw/ vxfk dv srzhu idqv/ vhuyhu srzhu vxssolhv/ hwf1

Qhz Surgxfw Odxqfk

Product
Features

- 4 Wkh surgxfwv Wm fdq uhdfk xs wr 483%/ phhwlj j wkh kljk0whp shudwxuh dssolfdwlrq vfhdulrv ri fxvwr phuvl
- 5 Wkh surgxfw dgrswv d mxpshu vwuxfwxuh/ dgg lwv vxujh fdsdflw| dgg khdw glvlsdwlrq fdsdflw| duh vxshulru wr wkrvh ri ZE surfhvv surgxfwv
- 6 Wkh uhyhuvh srzhu frqvxp swlrq ri wkh surgxfw lv orz/ dgg wkh wkhu p do uxqdzd| skhqr phqrq lv qrw hdv| wr rffxu lq kljk whp shudwxuh dssolfdwlrqv

Please refer to the official website for more details


Surgxfw Qdph	YUUP +Y,	or+D,	LIVP+D,	Udwhg or+D,	YI+Y,	LU+xD, C5 8%	LU+pD, C4 58%	Wm 3%
V47W	73	4	63	4	3188	433	43	483
VV47DW	73	4	63	4	3188	433	43	483
V57W	73	5	83	5	3188	433	43	483
VV57DW	73	5	83	5	3188	433	43	483
V67W	73	6	98	6	3183	433	43	483
VV67DW	73	6	98	6	3183	433	43	483



Lqgxwuldo srzhu vxssol



Srzhu vxssol idq



Vhuyhu srzhu vxssol

Typical
Applica-
tions