



- Low profile package
- Ideal for automated placement
- Glass passivated chip junction
- High forward surge capability
- Meets MSL level 1, per J-STD-020, LF maximum peak of 260 °C

For use in general purpose rectification of power supplies, inverters, converters, and freewheeling diodes for consumer, and telecommunication.

- : DO-214AA (SMB)
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant, halogen-free
- : Tin plated leads, solderable M] rDØfM- D

■ (Ta=25 Unless otherwise s

Maximum Repetitive peak reverse voltage	V_{RRM}								


Forward Surge Current (Non-repetitive) @60Hz Half-sine wave,1 cycle, Tj=25	I_{FSM}	A	150
Forward Surge Current (Non-repetitive) @1ms, square wave, 1 cycle, Tj=25			300
Current squared time @1ms≤t≤8.3ms Tj=25	I^2t	A ² s	94
Storage temperature	T_{stg}		-55 ~ +150
Junction temperature	T_j		-55 ~ +150

■ Ta=25 Unless otherwd 3/8

Maximum instantaneous forward voltage	V_F	V	$I_{FM}=5.0A$					1.1	
Maximum DC reverse current at rated DC blocking voltage	I_R								



■ Ta=25 Unless otherwise specified

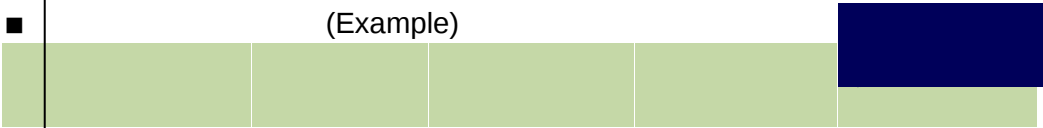



Dim	Millimeters



The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.