





Schottky Diodes

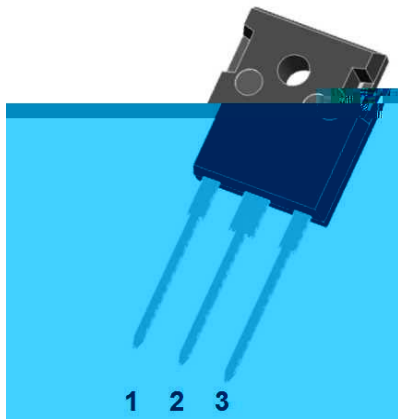

Features

- High frequency operation
- Low forward voltage drop
- High purity, high temperature epoxy encapsulation for

en h y l 9 ^ ! # u r

■Maximum Ratings ($T_a=25$ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	MBR4045PT
Device marking code			MBR4045PT
Repetitive Peak Reverse Voltage	V_{RRM}	V	45
Average Rectified Output Current @60Hz sine wave, R-load, $T_c=126$	I_o	A	40
Surge(Non-repetitive)Forward Current @60Hz half sine-wave, 1 c ' c@U6			
	2t	A ² s	373
Storage Temperature	T_{stg}		T

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	Min	Typ	Max
Peak Forward Voltage	V_{FM}	V	$I_{FM}=20.0A$ $T_j=25$	0.4	0.54	0.6
			$I_{FM}=20.0A$ $T_j=125$	-	-	0.52
DC reverse current at rated DC blocking voltage per diode	I_{RRM1}	mA	$V_{RM}=V_{RRM}$ $T_j=25$	-	-	0.2
			Applied Reverse Voltage of 4.0 V.D.C	600	900	1300

Note1:Pulse test:300uS pulse width,1% duty cycle

Note2:Pulse test:pulse width 40mS



■Thermal Characteristics $T_a=25$ Unless otherwise specified

PARAMETER	
-----------	--

MBR4045PT



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.