




Dual NPN+PNP Small Signal Transistor

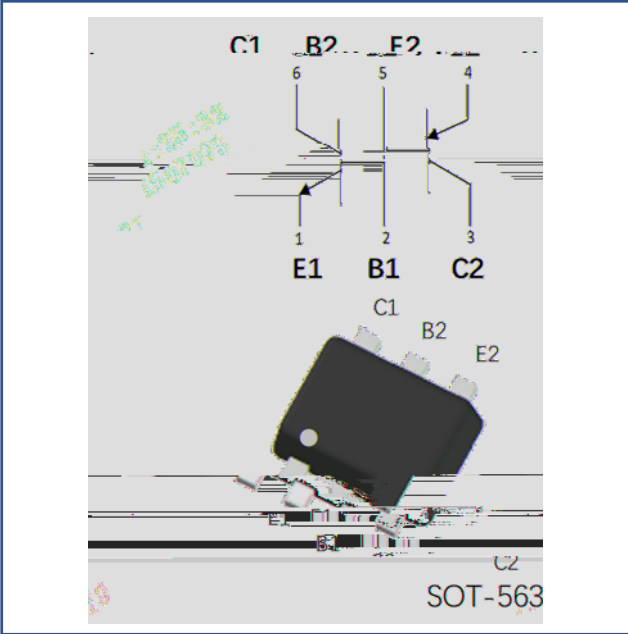

- Features**
- Moisture sensitivity level 1
 - Halogen free and RoHS compliant
 - Surface mount package ideally suited for automatic Insertion

- Application**
- Signal amplification
 - Switching circuit

- Mechanical data**
- **Package** SOT-563
 - **Terminals** Tin plated leads, solderable per J-STD-002 and JESD22-B102

Maximum Ratings ($T_a=25$ Unless otherwise specified)

TR1-NPN

Item	Symbol	Unit	Conditions	Value
Device marking code				K46
Collector-base voltage	V_{CBO}	V	$I_C=10\mu A, I_E=0$	60
Collector-emitter voltage	V_{CEO}	V	$I_C=1mA, I_B=0$	40
Emitter-base voltage	V_{EBO}	V	$I_E=10\mu A, I_C=0$	6
Collector current	I_C	mA		200
Power dissipation	P_D	mW		150
Junction temperature	T_J			-55 to +150
Storage temperature	T_{STG}			-55 to +150



MMDT3946V

RoHS
COMPLIANT

TR2-PNP

Item	Symbol	Unit	Conditions	Value
------	--------	------	------------	-------



MMDT3946V

RoHS

COMPLIANT

Item	Symbol	Unit	Conditions	Min	Typ	Max
Transition frequency	f_T	MHz	$V_{CE}=20V, I_C=20mA, f=100MHz$	300		
Delay time	t_d	ns	$V_{CC}=3V, I_C=10mA, V_{BE}=0.5V,$ $I_{B1}=1mA$			35
Rise time	t_r	ns				35
Storage time	t_s	ns	$V_{CC}=3V, I_C=10mA, I_{B1}=-I_{B2}=1mA$			200
Fall time	t_f	ns				50

TR2-PNP

Item	Symbol	Unit	Conditions	Min	Typ	Max
------	--------	------	------------	-----	-----	-----



Thermal Characteristics

Parameter	Symbol	Unit	Value
Thermal resistance, junction-to-ambient	R J-A ⁽¹⁾	/W	833
Thermal resistance, junction-to-case	R J-C ⁽¹⁾	/W	667

Note:
1 Thermal resistance from junction to ambient and from junction to lead mounted on P.C.B. with 25.4mm*25.4mm copper pad areas

Characteristics

TR1-NPN

Fig 1 Static Characteristics

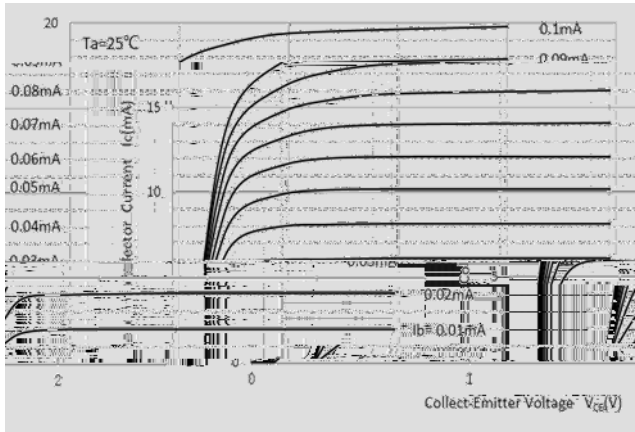


Fig 2 DC Current Gain

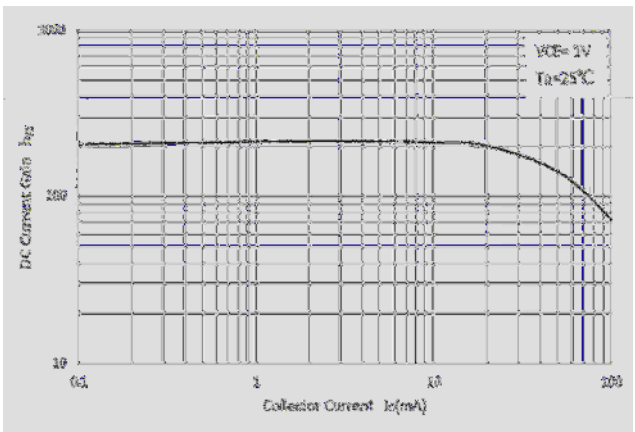


Fig 3 Collector-Emitter Saturation Voltage


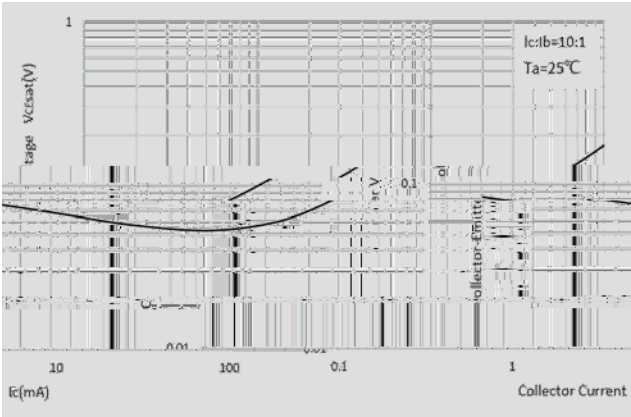


Fig 4 Base-Emitter Saturation Voltage



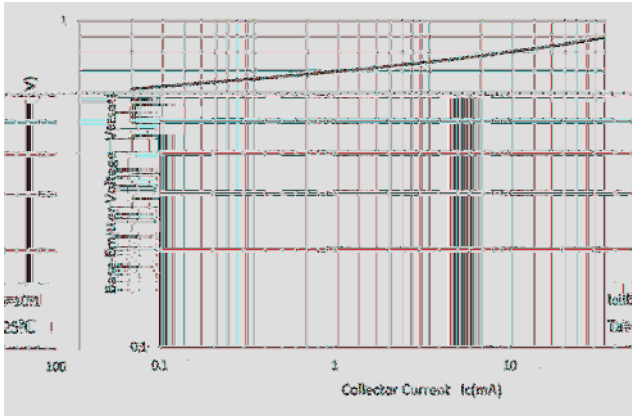

MMDT3946V

RoHS
COMPLIANT

Fig 5 1ya

1ya



MMDT3946V

RoHS
COMPLIANT

Fig 3 Collector-Emitter Saturation Voltage

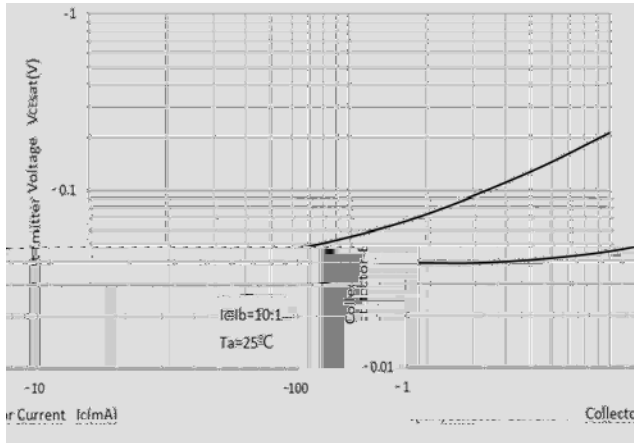


Fig 4 Base-Emitter Saturation Voltage

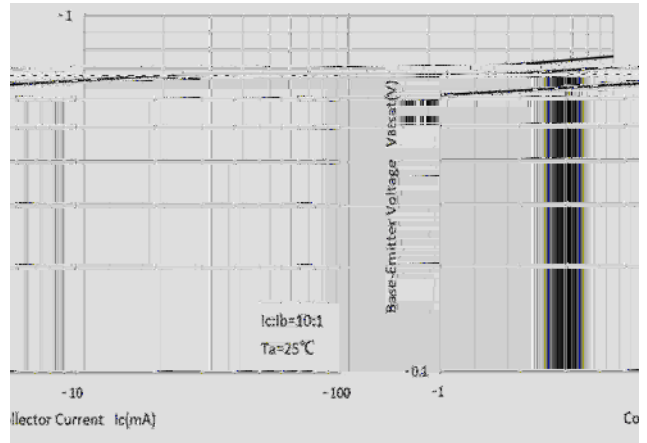


Fig 5 Base-Emitter Voltage

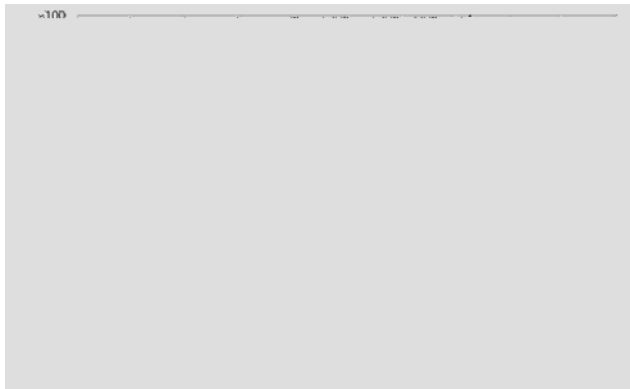


Fig 6 Cob/Cib-VCB/VEB


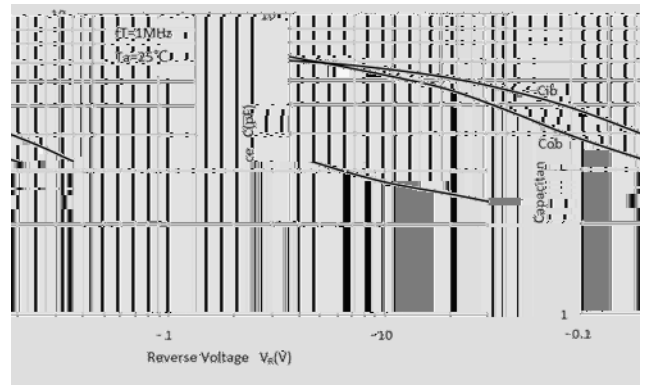


Fig 7 PD-Ta Curve



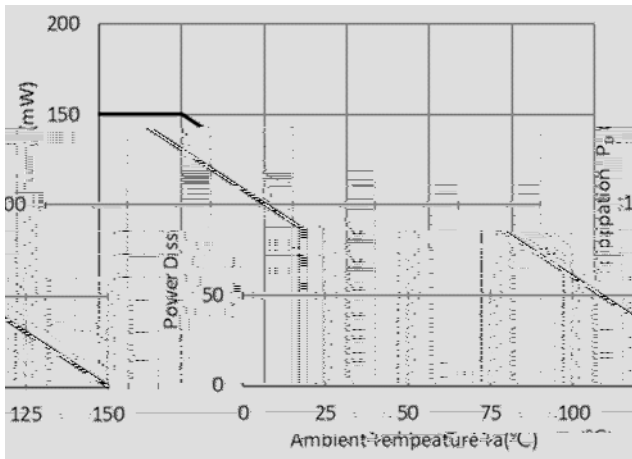

MMDT3946V

RoHS
COMPLIANT

Preferred P/N	Packing code	Unit weight(g)	Minimum package(pcs)	Inner box quantity(pcs)	Outer carton quantity(pcs)	Delivery mode
---------------	--------------	----------------	----------------------	-------------------------	----------------------------	---------------

MMDT3946V
